

Robot Mapping

Introduction to Robot Mapping

Cyrill Stachniss




AIS Autonomous Intelligent Systems

What is Robot Mapping?

- **Robot** – a device, that moves through the environment
- **Mapping** – modeling the environment

Related Terms

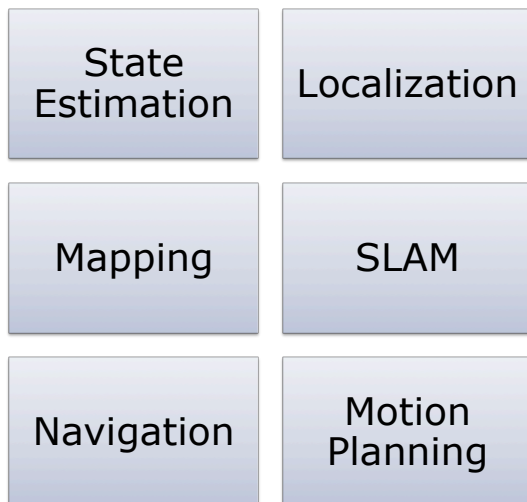


What is SLAM?

- Computing the robot's poses and the map of the environment at the same time
- **Localization:** estimating the robot's location
- **Mapping:** building a map
- **SLAM:** building a map and localizing the robot simultaneously

Localization Example


- Estimate the robot's poses given landmarks

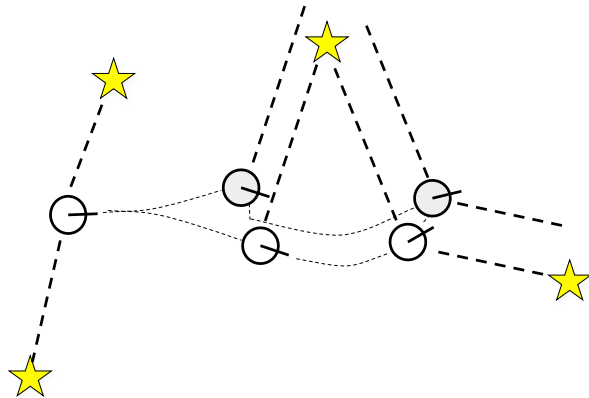

5

Mapping Example


- Estimate the landmarks given the robot's poses

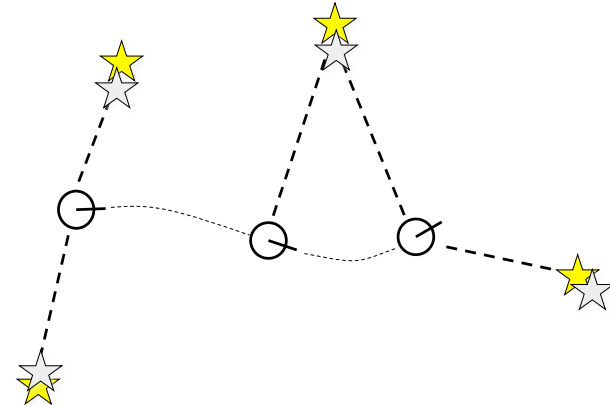

6

SLAM Example


- Estimate the robot's poses and the landmarks at the same time

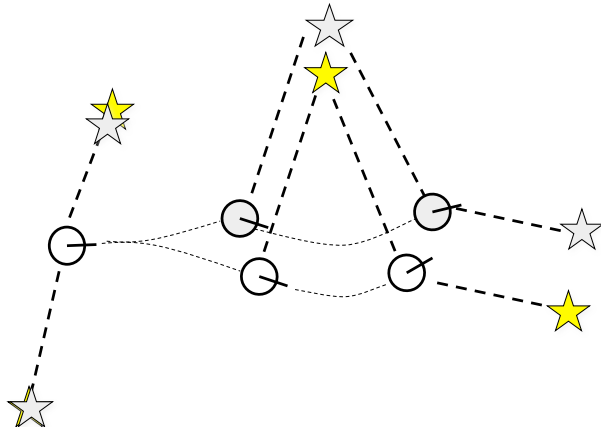

7

The SLAM Problem

- SLAM is a **chicken-or-egg** problem:
 - a map is needed for localization and
 - a pose estimate is needed for mapping

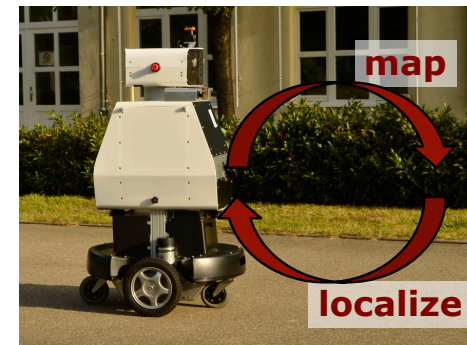

8

SLAM is Relevant

- It is considered a fundamental problem for truly autonomous robots
- SLAM is the basis for most navigation systems



9

SLAM Applications


- SLAM is central to a range of indoor, outdoor, air and underwater applications for both manned and autonomous vehicles.

Examples:

- At home: vacuum cleaner, lawn mower
- Air: surveillance with unmanned air vehicles
- Underwater: reef monitoring
- Underground: exploration of mines
- Space: terrain mapping for localization

10

SLAM Applications



Courtesy of Evolution Robotics, H. Durrant-Whyte, NASA, S. Thrun

11

SLAM Showcase – Mint



Courtesy of Evolution Robotics (now iRobot)

12

SLAM Showcase – EUROPA



13

Mapping Freiburg CS Campus



14

Definition of the SLAM Problem

Given

- The robot's controls
 $u_{1:T} = \{u_1, u_2, u_3 \dots, u_T\}$
- Observations
 $z_{1:T} = \{z_1, z_2, z_3 \dots, z_T\}$


Wanted

- Map of the environment
 m
- Path of the robot
 $x_{0:T} = \{x_0, x_1, x_2 \dots, x_T\}$

15

Probabilistic Approaches

- Uncertainty in the robot's motions and observations
- Use the probability theory to explicitly represent the uncertainty

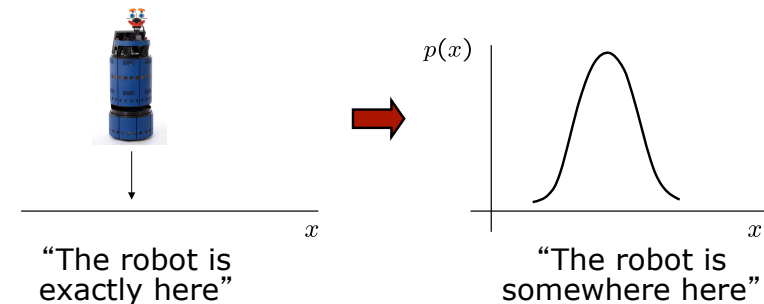

16

In the Probabilistic World


Estimate the robot's path and the map

$$p(x_{0:T}, m \mid z_{1:T}, u_{1:T})$$

distribution path map given observations controls

17

Graphical Model

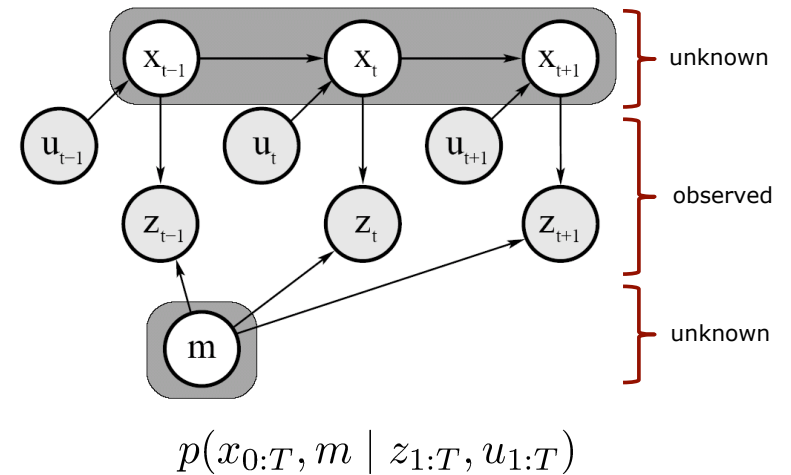

18

Full SLAM vs. Online SLAM

- Full SLAM estimates the entire path


$$p(x_{0:T}, m \mid z_{1:T}, u_{1:T})$$

- Online SLAM seeks to recover only the most recent pose

$$p(x_t, m \mid z_{1:t}, u_{1:t})$$

19

Graphical Model of Online SLAM

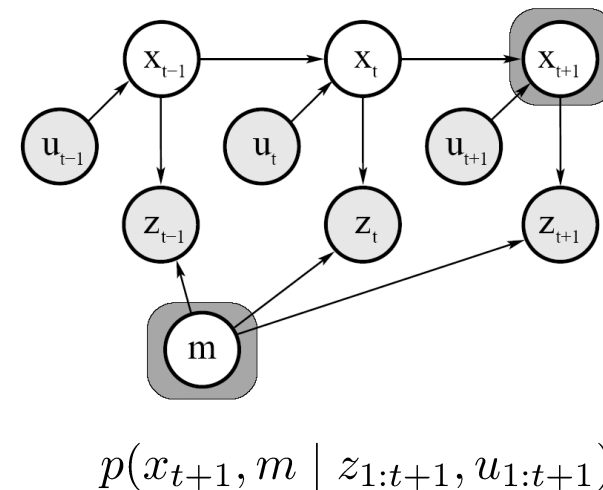

20

Online SLAM


- Online SLAM means marginalizing out the previous poses

$$p(x_t, m \mid z_{1:t}, u_{1:t}) = \int_{x_0} \dots \int_{x_{t-1}} p(x_{0:t}, m \mid z_{1:t}, u_{1:t}) dx_{t-1} \dots dx_0$$

- Integrals are typically solved recursively, one at a time

21

Graphical Model of Online SLAM

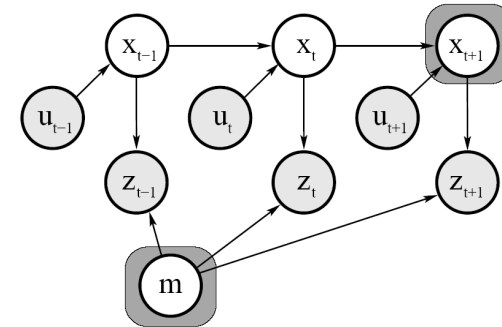


$$p(x_{t+1}, m \mid z_{1:t+1}, u_{1:t+1}) = \int_{x_0} \dots \int_{x_t} p(x_{0:t+1}, m \mid z_{1:t+1}, u_{1:t+1}) dx_t \dots dx_0$$

22

Why is SLAM a Hard Problem?

1. Robot path and map are both **unknown**

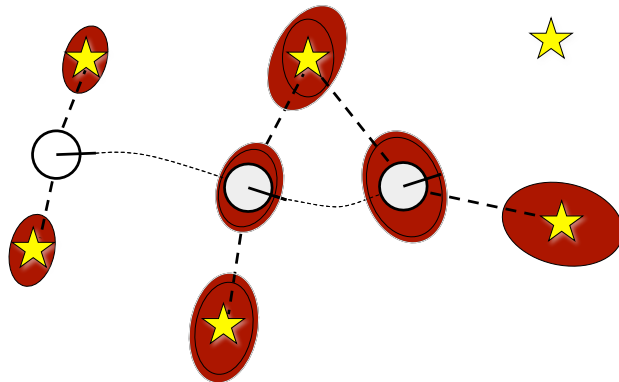


2. Map and pose estimates correlated

23

Why is SLAM a Hard Problem?



- The **mapping between observations and the map is unknown**
- Picking **wrong** data associations can have **catastrophic** consequences (divergence)

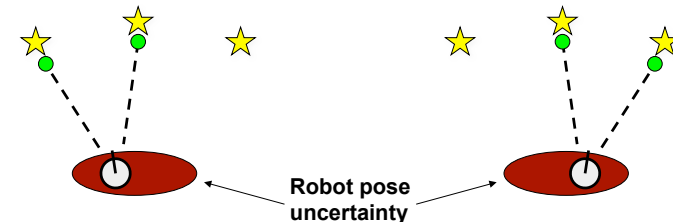

24

Taxonomy of the SLAM Problem

Volumetric vs. feature-based SLAM

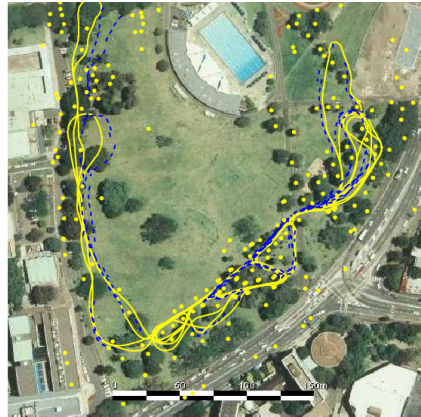

Courtesy by E. Nebot 25


Taxonomy of the SLAM Problem

Topologic vs. geometric maps



Taxonomy of the SLAM Problem

Known vs. unknown correspondence

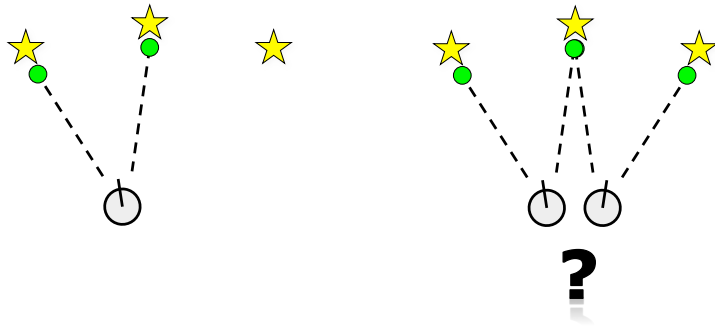


Taxonomy of the SLAM Problem

Static vs. dynamic environments



Taxonomy of the SLAM Problem

Small vs. large uncertainty

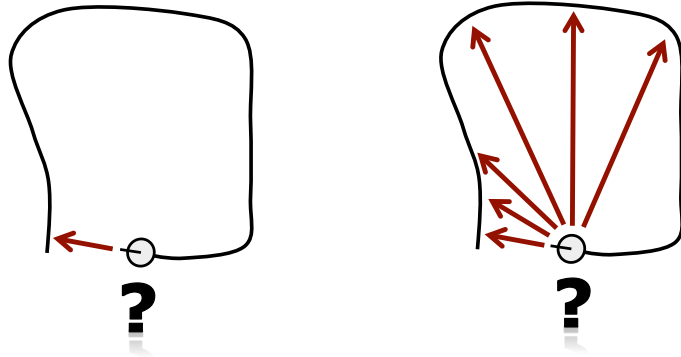

29

Taxonomy of the SLAM Problem

Active vs. passive SLAM


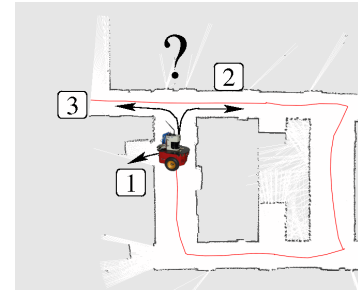


Image courtesy by Petter Duvander

30

Taxonomy of the SLAM Problem

Any-time and any-space SLAM

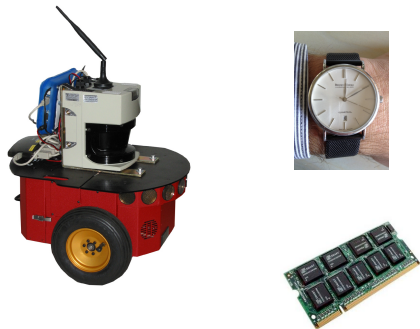

31

Taxonomy of the SLAM Problem

Single-robot vs. multi-robot SLAM



32

Approaches to SLAM

- Large variety of different SLAM approaches have been proposed
- Most robotics conferences dedicate multiple tracks to SLAM
- The majority of techniques uses probabilistic concepts
- History of SLAM dates back to the mid-eighties
- Related problems in geodesy and photogrammetry

33

SLAM History by Durrant-Whyte

- 1985/86: Smith et al. and Durrant-Whyte describe geometric uncertainty and relationships between features or landmarks
- 1986: Discussions at ICRA on how to solve the SLAM problem followed by the key paper by Smith, Self and Cheeseman
- 1990-95: Kalman-filter based approaches
- 1995: SLAM acronym coined at ISRR'95
- 1995-1999: Convergence proofs & first demonstrations of real systems
- 2000: Wide interest in SLAM started

34

Three Main Paradigms


Kalman
filter

Particle
filter

Graph-
based

35

Motion and Observation Model

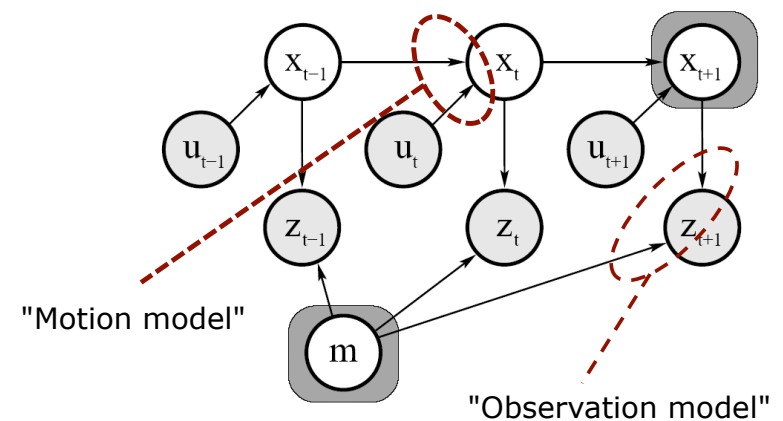

36

Motion Model

- The motion model describes the relative motion of the robot


$$p(x_t \mid x_{t-1}, u_t)$$

↖ ↗ ↑ ↖ ↖
 distribution new pose given old pose control

37

Motion Model Examples

- Gaussian model



- Non-Gaussian model



38


Standard Odometry Model

- Robot moves from $(\bar{x}, \bar{y}, \bar{\theta})$ to $(\bar{x}', \bar{y}', \bar{\theta}')$
- Odometry information $u = (\delta_{rot1}, \delta_{trans}, \delta_{rot2})$

$$\delta_{trans} = \sqrt{(\bar{x}' - \bar{x})^2 + (\bar{y}' - \bar{y})^2}$$

$$\delta_{rot1} = \text{atan2}(\bar{y}' - \bar{y}, \bar{x}' - \bar{x}) - \bar{\theta}$$

$$\delta_{rot2} = \bar{\theta}' - \bar{\theta} - \delta_{rot1}$$

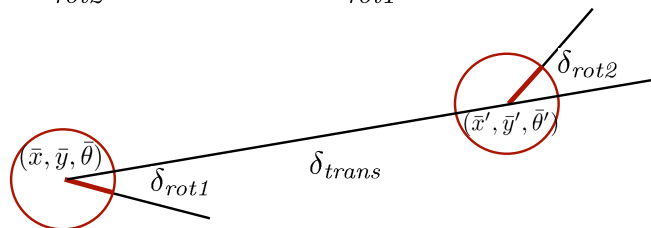

39

More on Motion Models

- Course: Introduction to Mobile Robotics, Chapter 6
- Thrun et al. "Probabilistic Robotics", Chapter 5

40

Observation Model

- The observation or sensor model relates measurements with the robot's pose


$$p(z_t | x_t)$$

distribution observation given pose


41

Observation Model Examples

- Gaussian model



- Non-Gaussian model

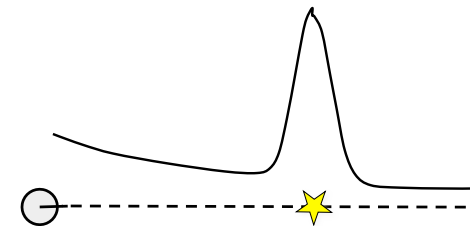

42

More on Observation Models

- Course: Introduction to Mobile Robotics, Chapter 7
- Thrun et al. "Probabilistic Robotics", Chapter 6

43

Summary

- Mapping is the task of modeling the environment
- Localization means estimating the robot's pose
- SLAM = simultaneous localization and mapping
- Full SLAM vs. Online SLAM
- Rich taxonomy of the SLAM problem

44

Literature

SLAM overview

- Springer "Handbook on Robotics", Chapter on Simultaneous Localization and Mapping (subsection 1 & 2)

On motion and observation models

- Thrun et al. "Probabilistic Robotics", Chapters 5 & 6
- Course: Introduction to Mobile Robotics, Chapters 6 & 7