

# Robot Mapping

## Grid-Based FastSLAM

**Gian Diego Tipaldi, Luciano Spinello,  
Wolfram Burgard**


---

# Motivation

- So far, we addressed landmark-based SLAM (KF-based SLAM, FastSLAM)
- We learned how to build grid maps assuming “known poses”

**Today: SLAM for building grid maps**

# Mapping With Raw Odometry

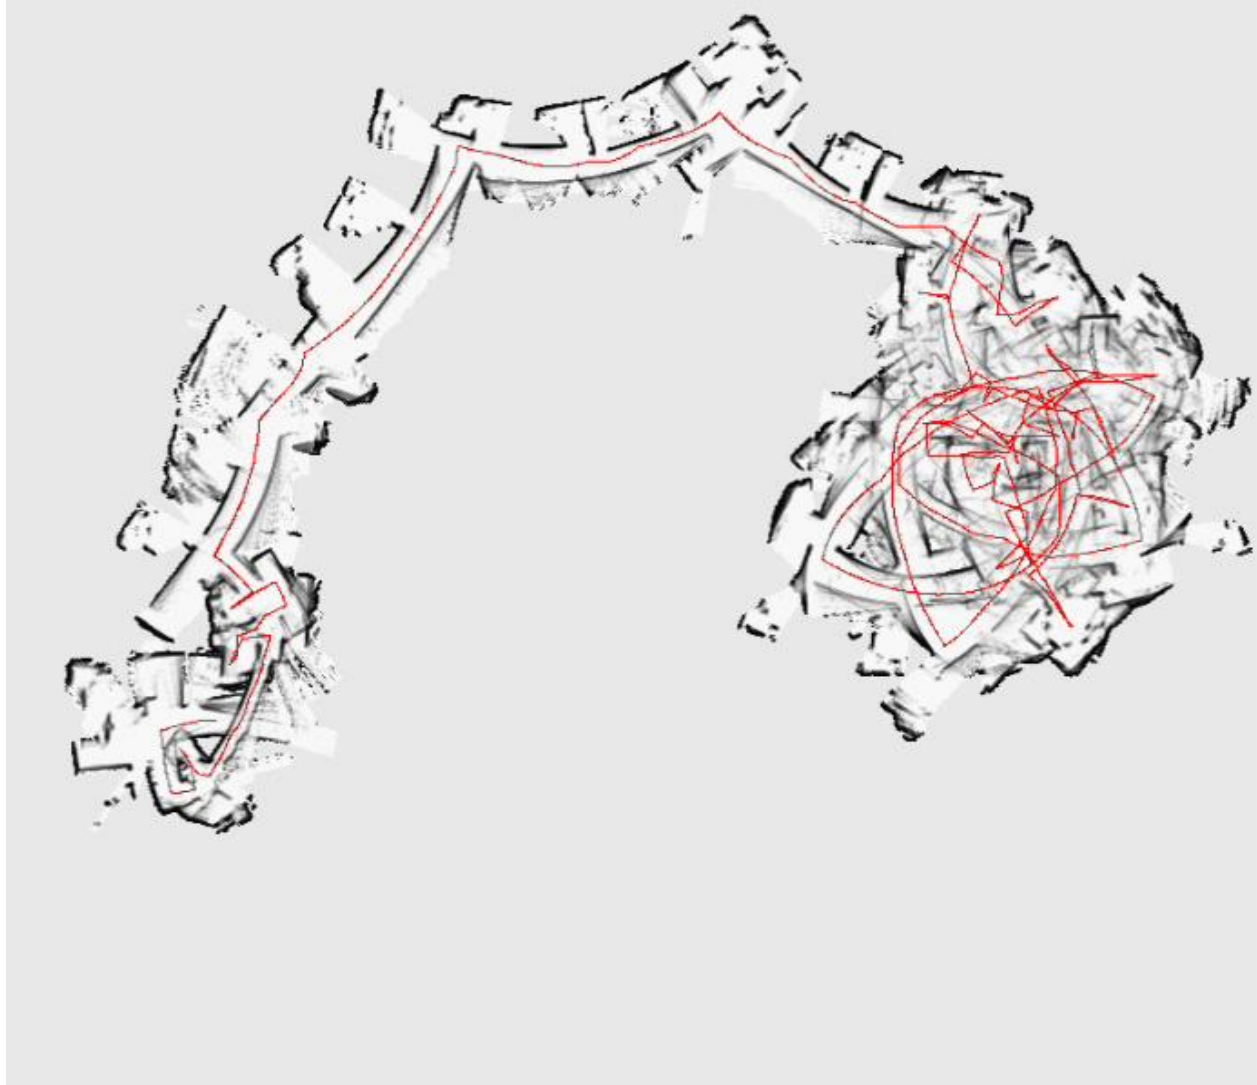

Courtesy: Dirk Hähnel

# Observation

- **Assuming known poses fails!**

## Questions

- Can we solve the SLAM problem if no pre-defined landmarks are available?
- Can we use the ideas of FastSLAM to build grid maps?

# Rao-Blackwellization for SLAM

- Factorization of the SLAM posterior

poses      map      observations & movements

$p(x_{0:t}, m \mid z_{1:t}, u_{1:t})$

# Rao-Blackwellization for SLAM

- Factorization of the SLAM posterior

poses      map      observations & movements

$p(x_{0:t}, m \mid z_{1:t}, u_{1:t})$

$= p(x_{0:t} \mid z_{1:t}, u_{1:t}) p(m \mid x_{1:t}, z_{1:t})$


path posterior  
(particle filter)

map posterior  
(given the path)

# Grid-Based SLAM

- As with landmarks, the map depends on the poses of the robot during data acquisition
- If the poses are known, grid-based mapping is easy (“mapping with known poses”)

# A Graphical Model for Grid-Based SLAM

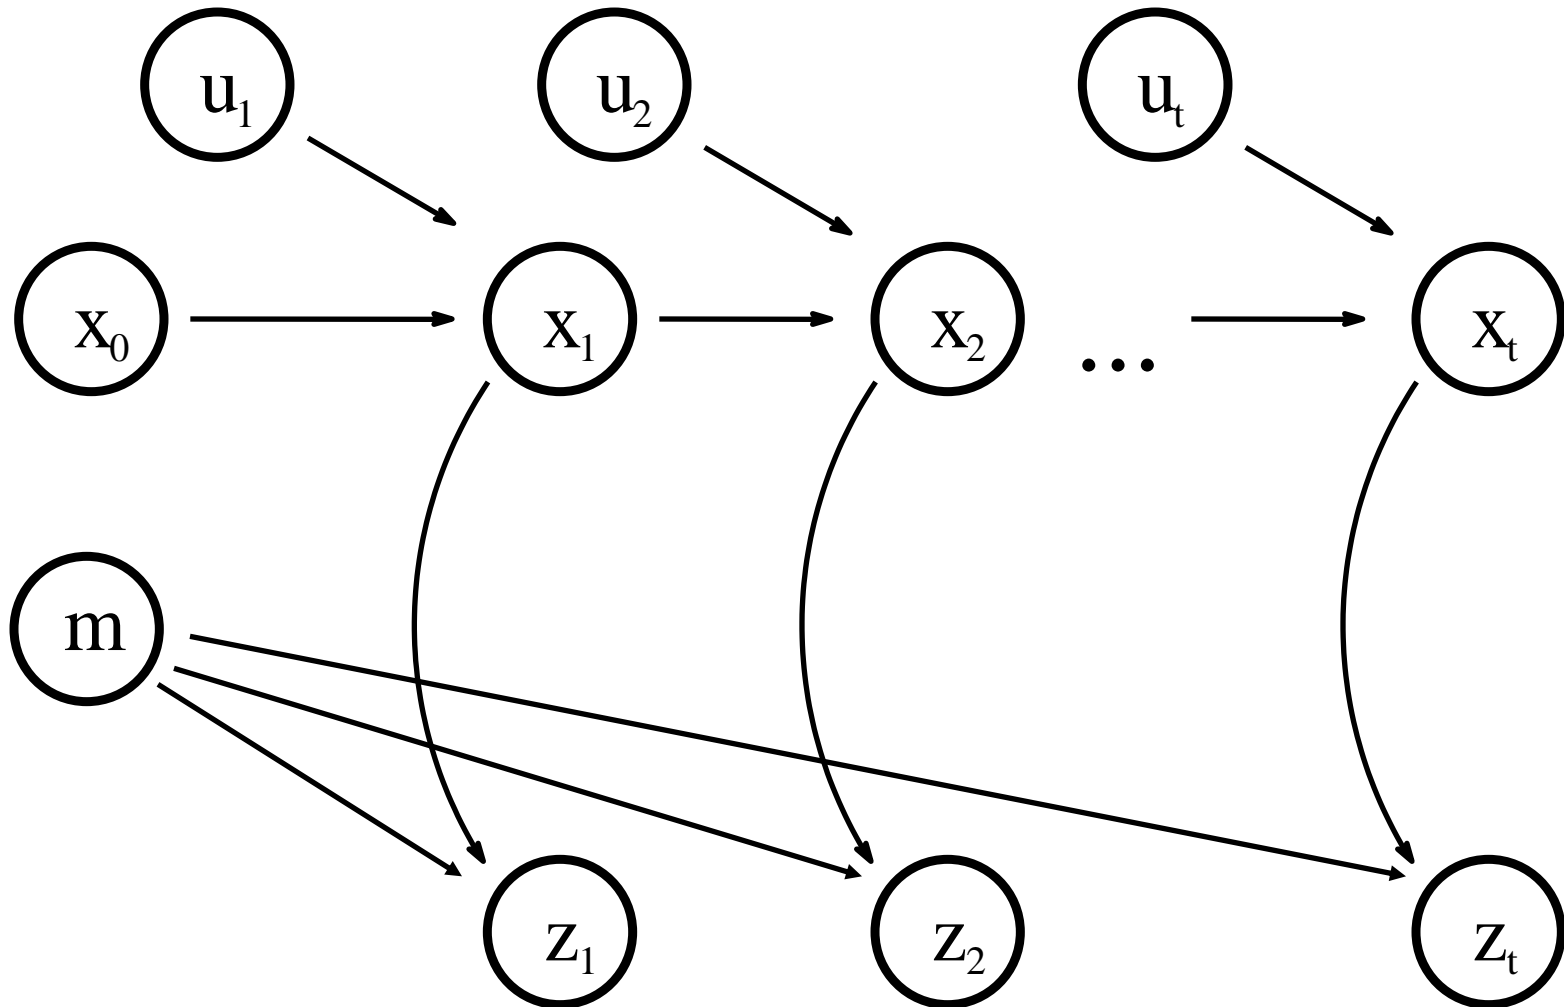




# Grid-Based Mapping with Rao-Blackwellized Particle Filters



- Each particle represents a possible trajectory of the robot
- Each particle maintains its own map
- Each particle updates it upon “mapping with known poses”

# Particle Filter Example

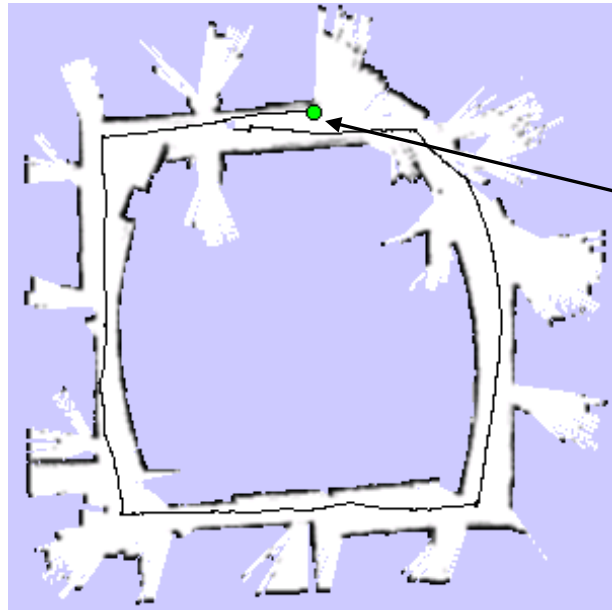


map of particle 1

3 particles

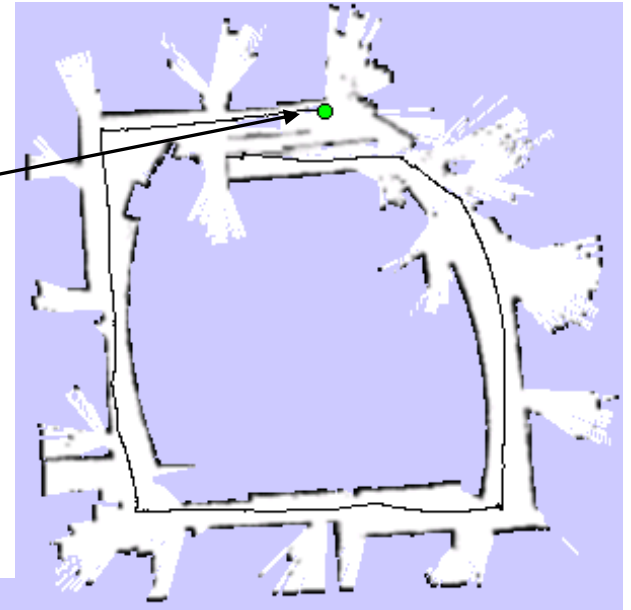


map of particle 3

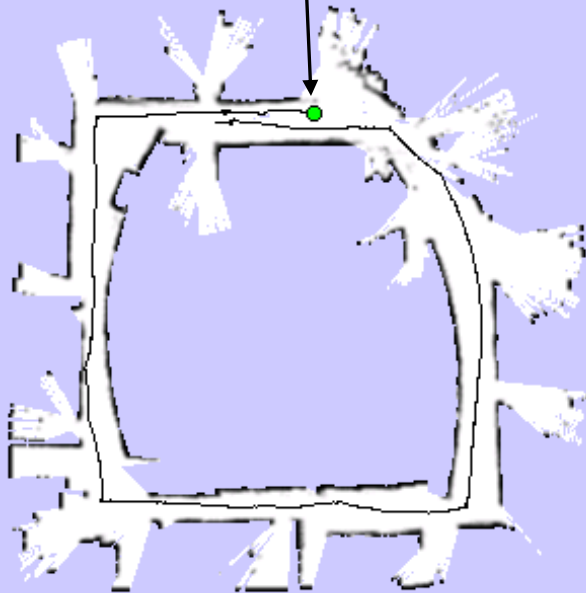

map of particle 2

# Performance of Grid-Based FastSLAM 1.0

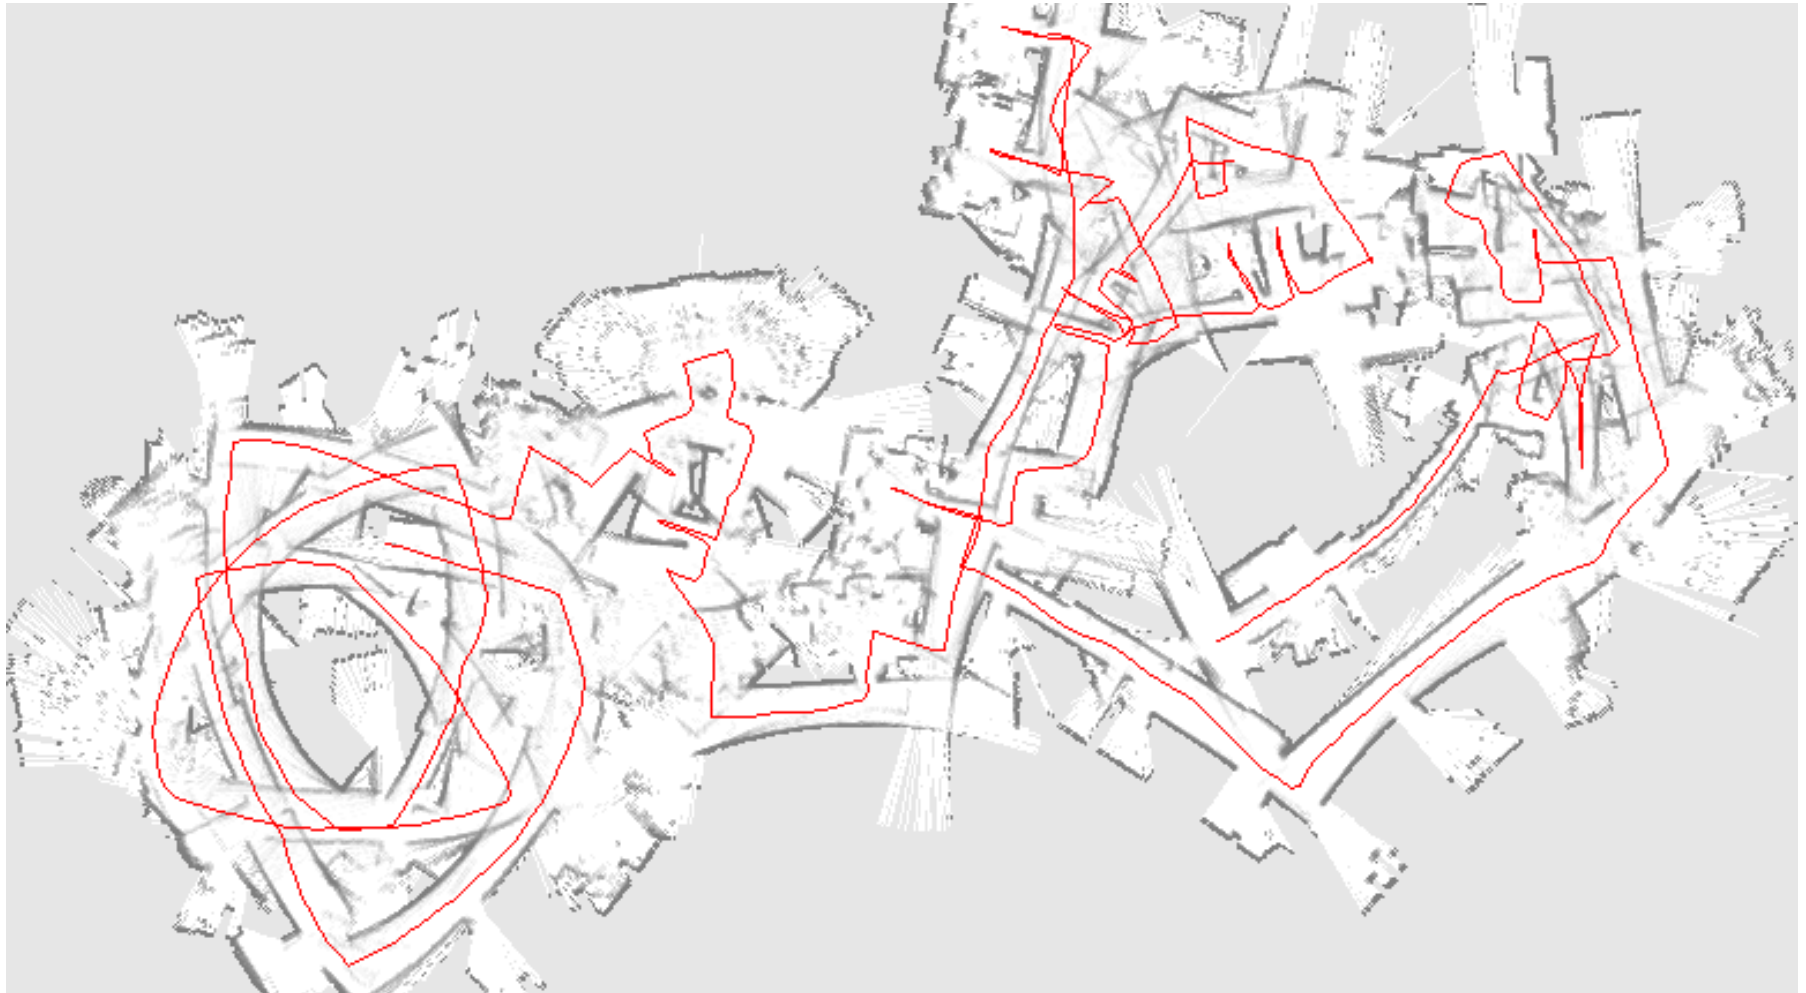

# Problem

- Too many samples are needed to sufficiently model the motion noise
- Increasing the number of samples is difficult as each map is quite large
- **Idea:** Improve the pose estimate **before** applying the particle filter

# Pose Correction Using Scan-Matching

Maximize the likelihood of the **current** pose and map relative to the **previous** pose and map


$$x_t^* = \underset{x_t}{\operatorname{argmax}} \left\{ p(z_t \mid x_t, m_{t-1}) p(x_t \mid u_t, x_{t-1}^*) \right\}$$

current measurement

robot motion


map constructed so far

# Motion Model for Scan Matching

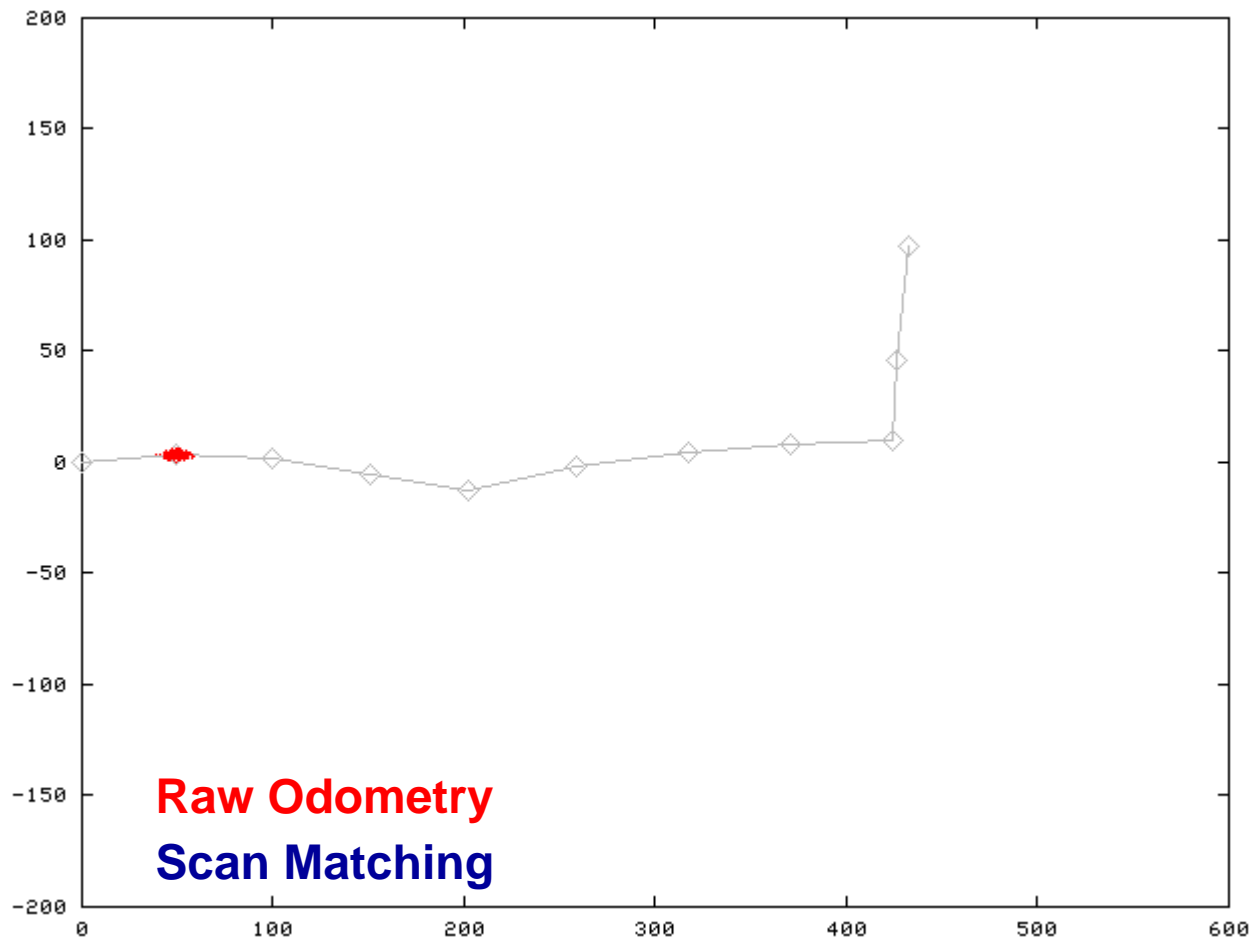

Courtesy: Dirk Hähnel

# Mapping using Scan Matching

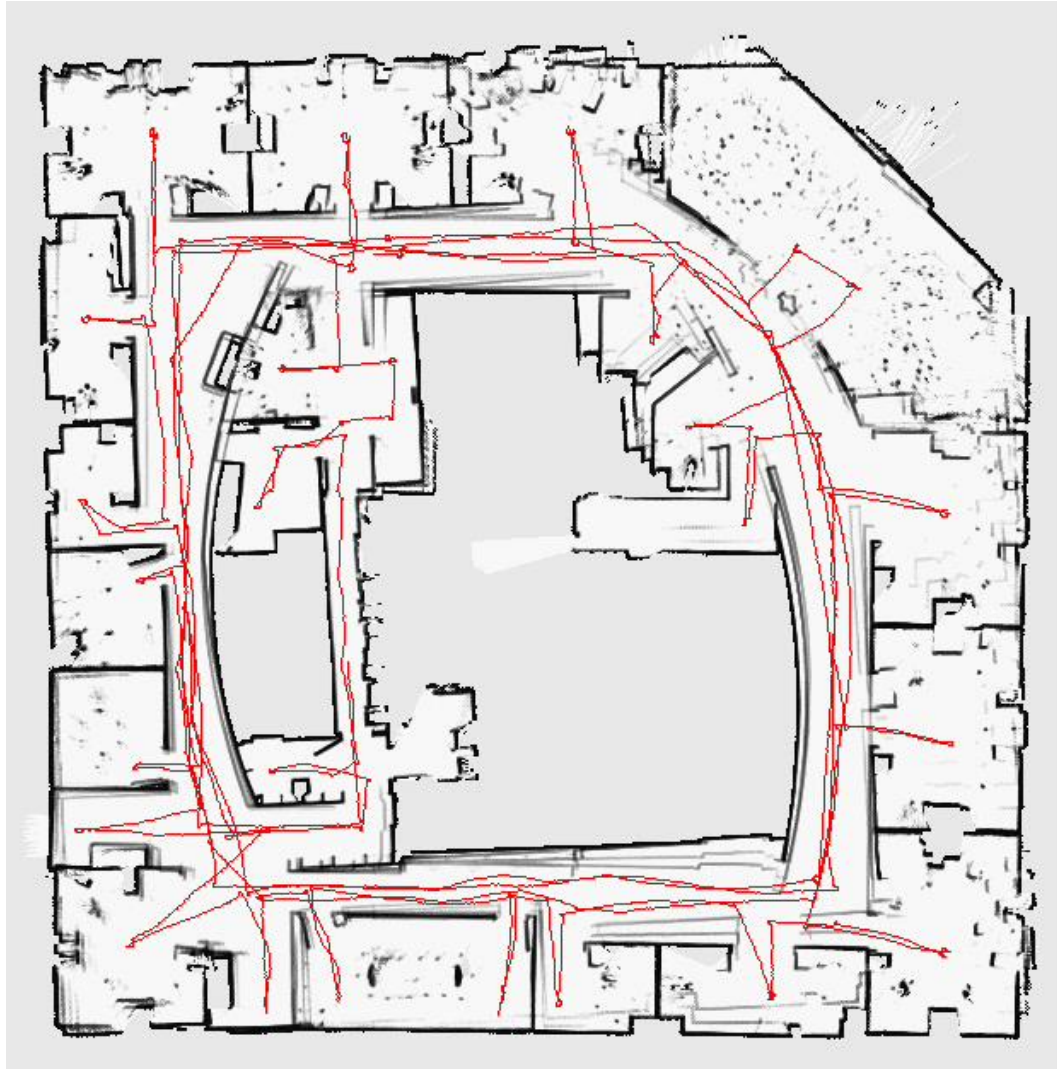


Courtesy: Dirk Hähnel

# Grid-Based FastSLAM with Improved Odometry


- Scan-matching provides a **locally consistent** pose correction
- Pre-correct short odometry sequences using scan-matching and use them as input to FastSLAM
- Fewer particles are needed, since the error in the input is smaller



# Graphical Model for Mapping with Improved Odometry

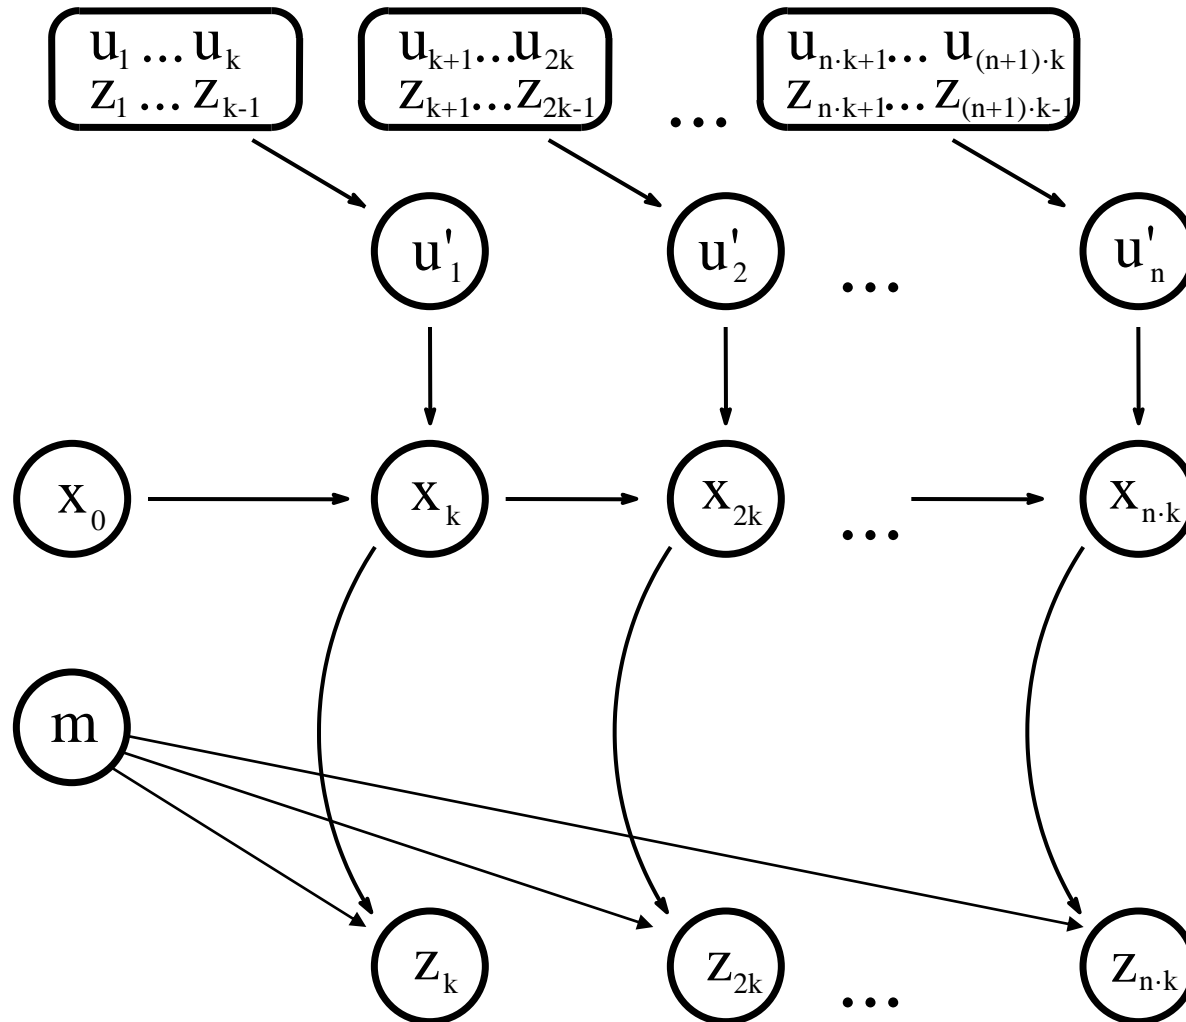


# Grid-Based FastSLAM with Scan-Matching

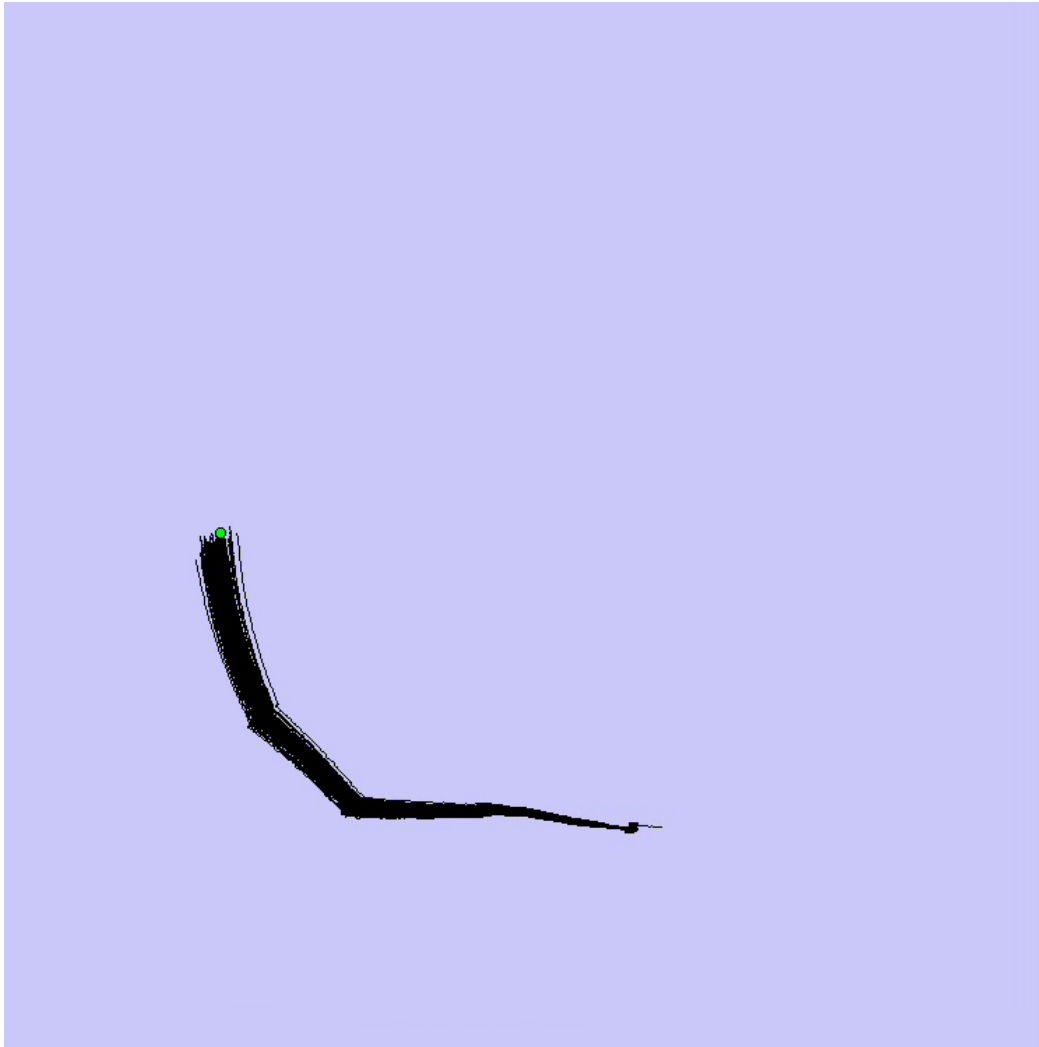


Courtesy:  
Dirk Hähnel

# Grid-Based FastSLAM with Scan-Matching

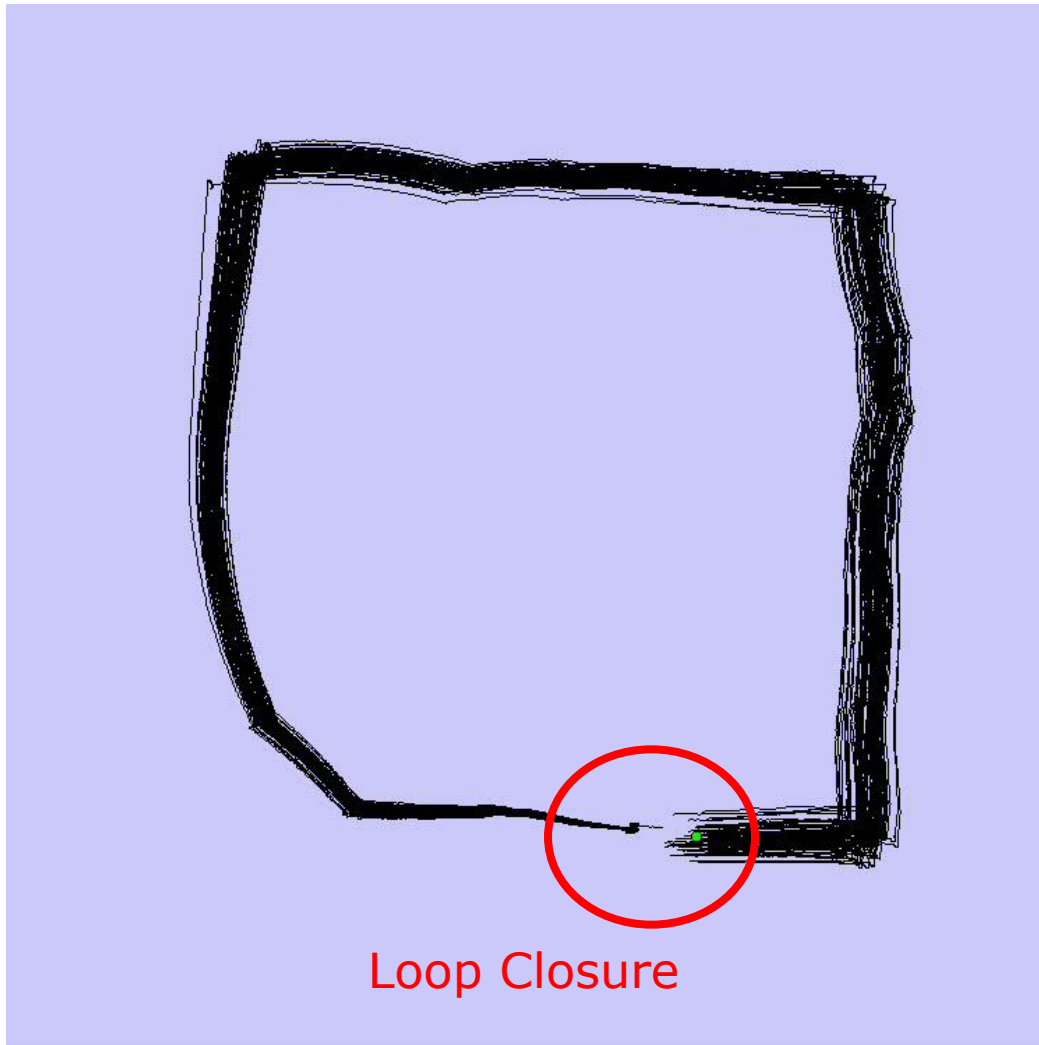

Courtesy:  
Dirk Hähnel

# Grid-Based FastSLAM with Scan-Matching

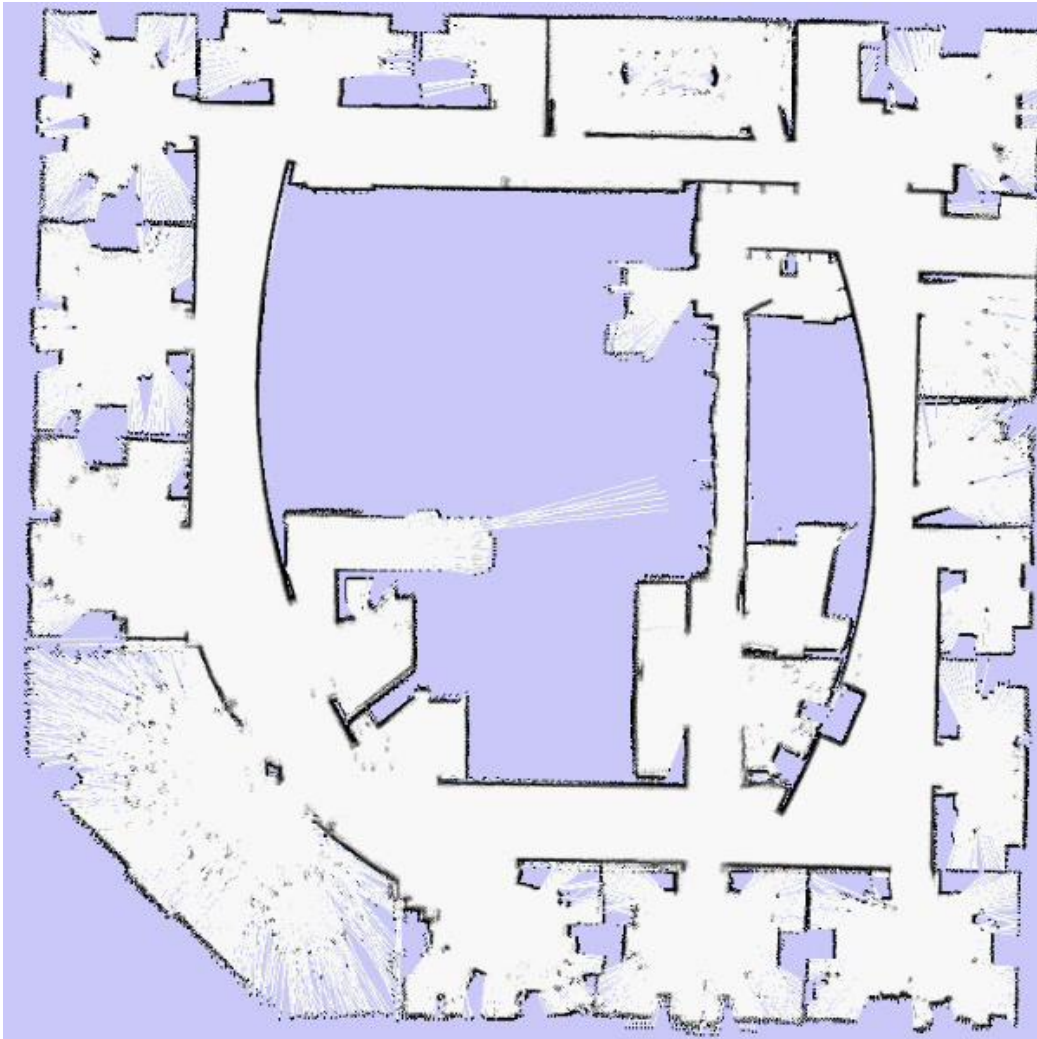

Courtesy:  
Dirk Hähnel

# Summary so far ...

- Approach to SLAM that combines scan matching and FastSLAM
- Scan matching to generate virtual 'high quality' motion commands
- Can be seen as an ad-hoc solution to an improved proposal distribution

# What's Next?

- Compute an improved proposal that considers the most recent observation

$$x_t^{[k]} \sim p(x_t \mid x_{1:t-1}^{[k]}, u_{1:t}, z_{1:t})$$


## Goals:

- More precise sampling
- More accurate maps
- Less particles needed

# The Optimal Proposal Distribution

[Arulampalam et al., 01]

$$p(x_t | x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) = \frac{p(z_t | x_t, m^{[i]}) p(x_t | x_{t-1}^{[i]}, u_t)}{p(z_t | x_{t-1}^{[i]}, m^{[i]}, u_t)}$$

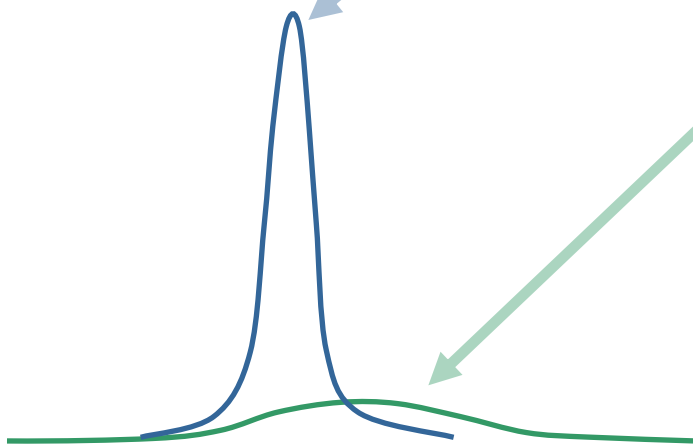

For lasers  $p(z_t | x_t, m^{[i]})$  is typically peaked and dominates the product


# Proposal Distribution

$$p(x_t \mid x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) = \frac{\overbrace{p(z_t \mid x_t, m^{[i]}) p(x_t \mid x_{t-1}^{[i]}, u_t)}^{\tau(x_t)}}{p(z_t \mid x_{t-1}^{[i]}, m^{[i]}, u_t)}$$



# Proposal Distribution


$$p(x_t | x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) = \frac{\overbrace{p(z_t | x_t, m^{[i]}) p(x_t | x_{t-1}^{[i]}, u_t)}^{\tau(x_t)}}{p(z_t | x_{t-1}^{[i]}, m^{[i]}, u_t)}$$



$$p(z_t | x_{t-1}^{[i]}, m^{[i]}, u_t) = \int p(z_t | x_t, m^{[i]}) p(x_t | x_{t-1}^{[i]}, u_t) dx_t$$

# Proposal Distribution

$$p(x_t | x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) = \frac{\overbrace{p(z_t | x_t, m^{[i]}) p(x_t | x_{t-1}^{[i]}, u_t)}^{\tau(x_t)}}{p(z_t | x_{t-1}^{[i]}, m^{[i]}, u_t)}$$

$$p(z_t | x_{t-1}^{[i]}, m^{[i]}, u_t) = \int p(z_t | x_t, m^{[i]}) p(x_t | x_{t-1}^{[i]}, u_t) dx_t$$


$$p(x_t | x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) = \frac{\tau(x_t)}{\int \tau(x_t) dx_t}$$

# Proposal Distribution


$$p(x_t \mid x_{t-1}^{[i]}, m^{[i]}, z_t, u_t)$$
$$= \frac{\overbrace{p(z_t \mid x_t, m^{[i]}) p(x_t \mid x_{t-1}^{[i]}, u_t)}^{\tau(x_t)}}{\int \underbrace{p(z_t \mid x_t, m^{[i]})}_{\text{locally}} \underbrace{p(x_t \mid x_{t-1}^{[i]}, u_t)}_{\text{globally}} dx_t}$$

**locally** limits  
the area over  
which to integrate  
(measurement)

**globally** limits  
the area over  
which to integrate  
(odometry)

# Proposal Distribution

$$p(x_t \mid x_{t-1}^{[i]}, m^{[i]}, z_t, u_t)$$
$$= \frac{\overbrace{p(z_t \mid x_t, m^{[i]}) p(x_t \mid x_{t-1}^{[i]}, u_t)}^{\tau(x_t)}}{\int \underbrace{p(z_t \mid x_t, m^{[i]})}_{\text{local}} \underbrace{p(x_t \mid x_{t-1}^{[i]}, u_t)}_{\text{global}} dx_t}$$

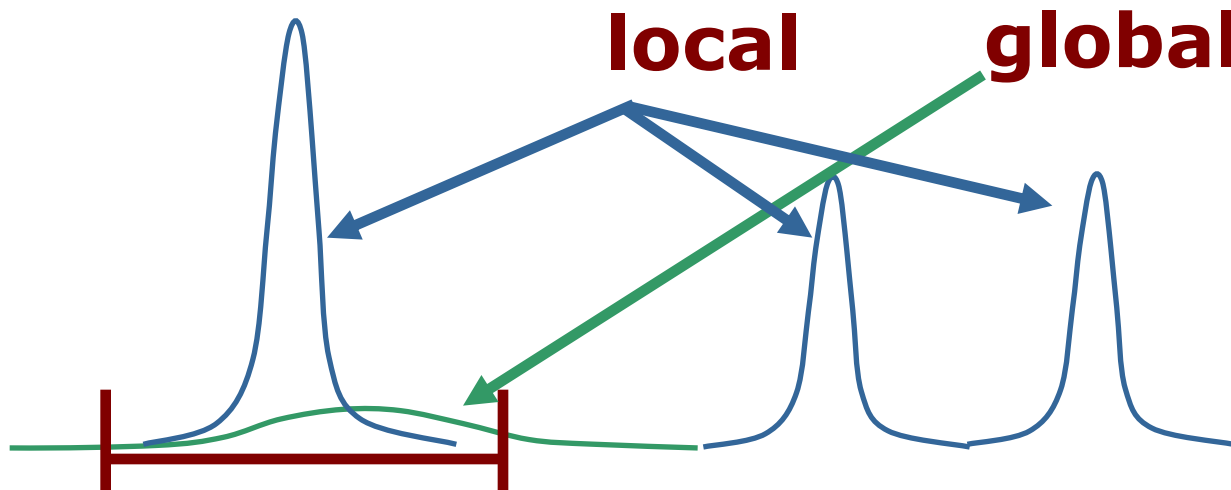

# Proposal Distribution

$$p(x_t \mid x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) \simeq \frac{\tau(x_t)}{\int_{\{x_t \mid \tau(x_t) > \epsilon\}} \tau(x_t) dx_t}$$

with  $\tau(x_t) = p(z_t \mid x_t, m^{[i]}) p(x_t \mid x_{t-1}^{[i]}, u_t)$

**How to sample from this term?**

**Gaussian approximation:**


$$\tau(x_t) \simeq \mathcal{N}(\mu^{[i]}, \Sigma^{[i]})$$

# Gaussian Proposal Distribution


$$p(x_t \mid x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) \simeq \frac{\tau(x_t)}{\int_{\{x_t \mid \tau(x_t) > \epsilon\}} \tau(x_t) dx_t}$$

Approximate by a Gaussian:

maximum reported  
by a scan matcher

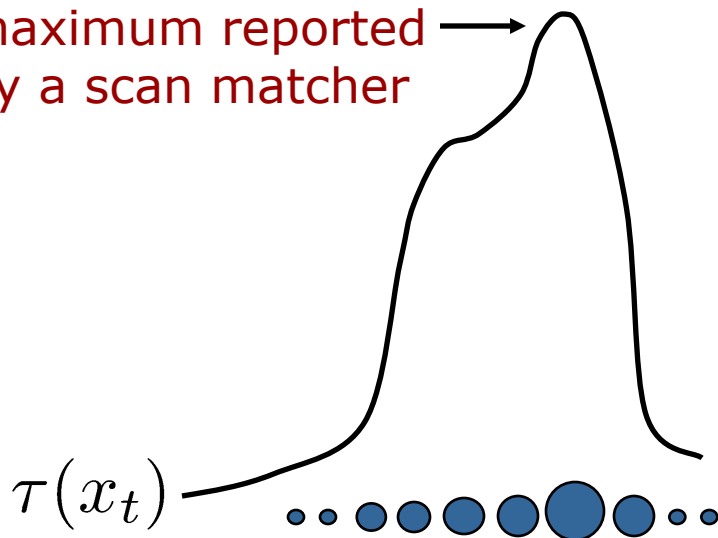

Gaussian  
approximation

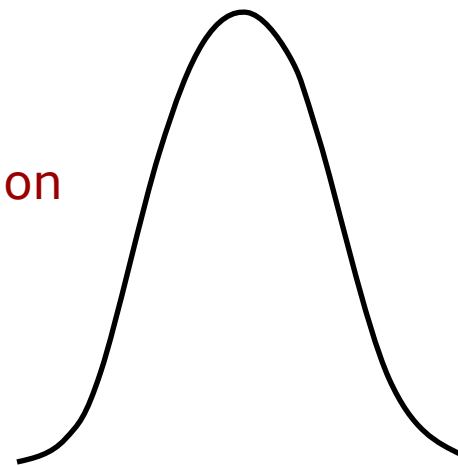

Draw next  
generation of  
samples

Sampled points around  
the maximum

# Estimating the Parameters of the Gaussian for Each Particle

$$\mu^{[i]} = \frac{1}{\eta} \sum_{j=1}^K x_j \tau(x_j)$$

$$\Sigma^{[i]} = \frac{1}{\eta} \sum_{j=1}^K (x_j - \mu^{[i]})(x_j - \mu^{[i]})^T \tau(x_j)$$

$x_j$  are the points sampled around  
the result of the scan matcher

# Gaussian Proposal Distribution

$$p(x_t \mid x_{t-1}^{[i]}, m^{[i]}, z_t, u_t) \simeq \frac{\tau(x_t)}{\int_{\{x_t \mid \tau(x_t) > \epsilon\}} \tau(x_t) dx_t}$$

$$\tau(x_t) \simeq \mathcal{N}(\mu^{[i]}, \Sigma^{[i]})$$

$\mu^{[i]} = \frac{1}{\eta} \sum_{j=1}^K x_j \tau(x_j)$

$\Sigma^{[i]} = \frac{1}{\eta} \sum_{j=1}^K (x_j - \mu^{[i]})(x_j - \mu^{[i]})^T \tau(x_j)$


$$\int_{\{x_t \mid \tau(x_t) > \epsilon\}} \tau(x_t) dx_t \simeq \sum_{j=1}^K \tau(x_j)$$



# The Importance Weight

$$w_t^{[i]} = \frac{\text{target}(x_t^{[i]})}{\text{proposal}(x_t^{[i]})}$$

# The Importance Weight
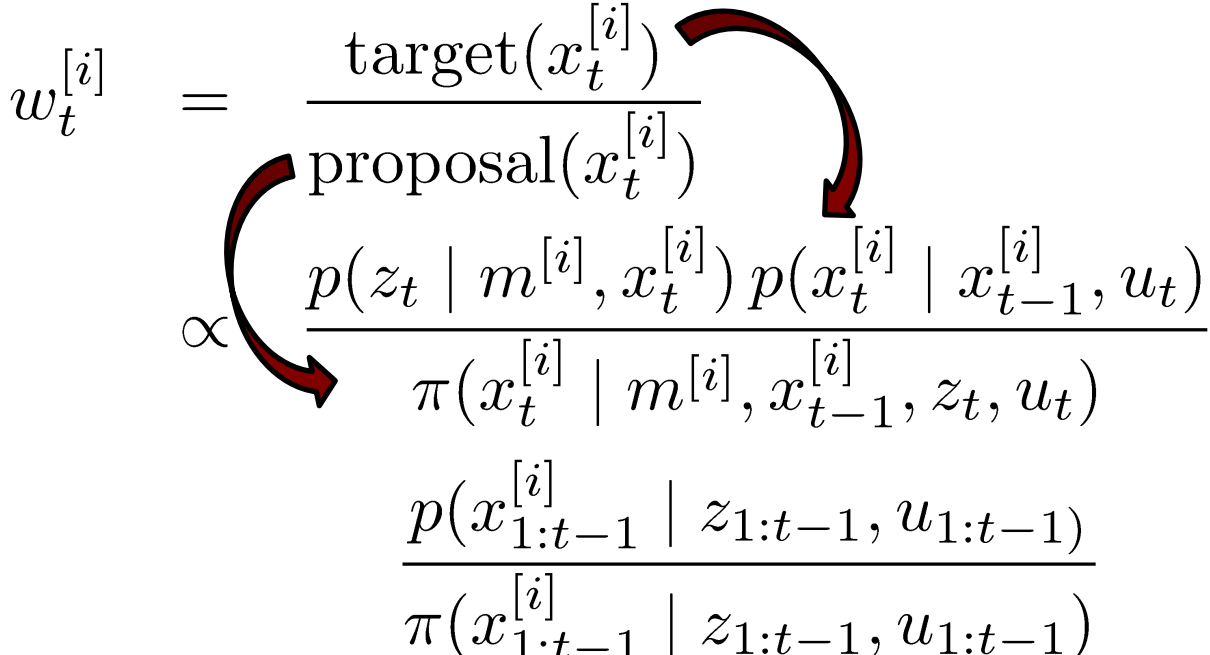
$$w_t^{[i]} = \frac{\text{target}(x_t^{[i]})}{\text{proposal}(x_t^{[i]})} \propto \frac{p(z_t \mid m^{[i]}, x_t^{[i]}) p(x_t^{[i]} \mid x_{t-1}^{[i]}, u_t)}{\pi(x_t^{[i]} \mid m^{[i]}, x_{t-1}^{[i]}, z_t, u_t) \frac{p(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})}{\pi(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})}}$$
The diagram illustrates the decomposition of the importance weight  $w_t^{[i]}$ . It starts with the definition  $w_t^{[i]} = \frac{\text{target}(x_t^{[i]})}{\text{proposal}(x_t^{[i]})}$ . A red arrow points from the target term to the numerator of a more complex fraction:  $\frac{p(z_t \mid m^{[i]}, x_t^{[i]}) p(x_t^{[i]} \mid x_{t-1}^{[i]}, u_t)}{\pi(x_t^{[i]} \mid m^{[i]}, x_{t-1}^{[i]}, z_t, u_t)}$ . A second red arrow points from the proposal term to the denominator of the same fraction. A third red arrow points from the entire fraction to the final expression:  $\frac{p(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})}{\pi(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})}$ . The symbol  $\propto$  is placed to the left of the fraction, indicating proportionality.

# The Importance Weight

$$\begin{aligned}
 w_t^{[i]} &= \frac{\text{target}(x_t^{[i]})}{\text{proposal}(x_t^{[i]})} \\
 &\propto \frac{p(z_t \mid m^{[i]}, x_t^{[i]}) p(x_t^{[i]} \mid x_{t-1}^{[i]}, u_t)}{\pi(x_t^{[i]} \mid m^{[i]}, x_{t-1}^{[i]}, z_t, u_t)} \\
 &\quad \frac{p(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})}{\pi(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})} \\
 &= \frac{p(z_t \mid m^{[i]}, x_t^{[i]}) p(x_t^{[i]} \mid x_{t-1}^{[i]}, u_t)}{\int p(z_t \mid m^{[i]}, x_t) p(x_t \mid x_{t-1}^{[i]}, u_t) dx_t} w_{t-1}^{[i]}
 \end{aligned}$$

# The Importance Weight

$$\begin{aligned}w_t^{[i]} &= \frac{\text{target}(x_t^{[i]})}{\text{proposal}(x_t^{[i]})} \\ &\propto \frac{p(z_t \mid m^{[i]}, x_t^{[i]}) p(x_t^{[i]} \mid x_{t-1}^{[i]}, u_t)}{\pi(x_t^{[i]} \mid m^{[i]}, x_{t-1}^{[i]}, z_t, u_t)} \\ &\quad \frac{p(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})}{\pi(x_{1:t-1}^{[i]} \mid z_{1:t-1}, u_{1:t-1})} \\ &= \frac{p(z_t \mid m^{[i]}, x_t^{[i]}) p(x_t^{[i]} \mid x_{t-1}^{[i]}, u_t)}{\frac{p(z_t \mid m^{[i]}, x_t^{[i]}) p(x_t^{[i]} \mid x_{t-1}^{[i]}, u_t)}{\int p(z_t \mid m^{[i]}, x_t) p(x_t \mid x_{t-1}^{[i]}, u_t) dx_t}} w_{t-1}^{[i]} \\ &= w_{t-1}^{[i]} \int p(z_t \mid m^{[i]}, x_t) p(x_t \mid x_{t-1}^{[i]}, u_t) dx_t\end{aligned}$$

# The Importance Weight

$$w_t^{[i]} = w_{t-1}^{[i]} \int p(z_t | x_t, m^{[i]}) p(x_t | x_{t-1}^{[i]}, u_t) dx_t$$

# The Importance Weight

$$\begin{aligned} w_t^{[i]} &= w_{t-1}^{[i]} \int p(z_t \mid x_t, m^{[i]}) p(x_t \mid x_{t-1}^{[i]}, u_t) dx_t \\ &\approx w_{t-1}^{[i]} \int_{\{x_t \mid \tau(x_t) > \epsilon\}} \tau(x_t) dx_t \end{aligned}$$

# The Importance Weight

$$w_t^{[i]} = w_{t-1}^{[i]} \int p(z_t | x_t, m^{[i]}) p(x_t | x_{t-1}^{[i]}, u_t) dx_t$$


$$\approx w_{t-1}^{[i]} \int_{\{x_t | \tau(x_t) > \epsilon\}} \tau(x_t) dx_t$$

$$\approx w_{t-1}^{[i]} \sum_{j=1}^K \tau(x_j)$$

**Already computed  
for the proposal!**




Sampled points around the  
maximum of the likelihood  
function found by scan-  
matching



# Improved Proposal


- The proposal adapts to the structure of the environment

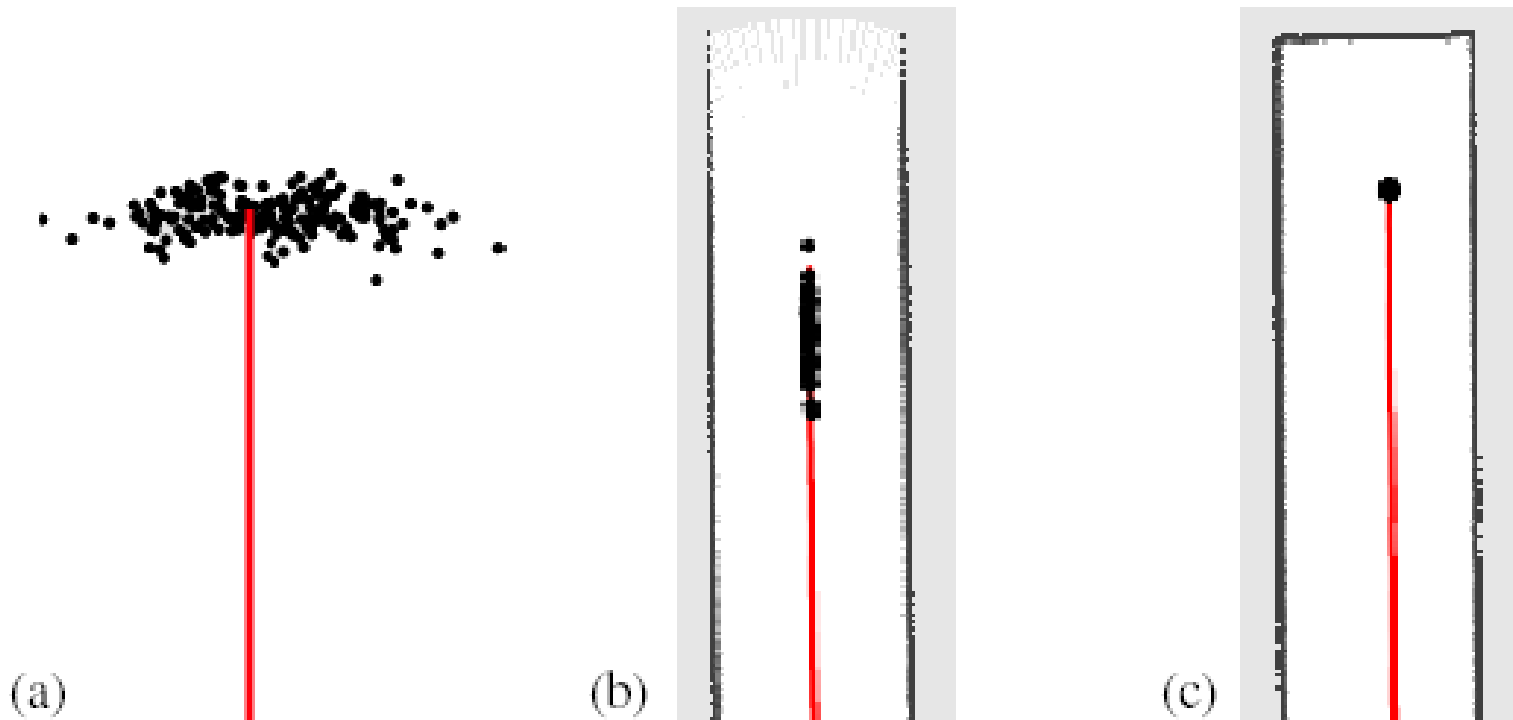



# Resampling

- Resampling at each step limits the “memory” of our filter
- Suppose we loose each time 25% of the particles, this may lead to:

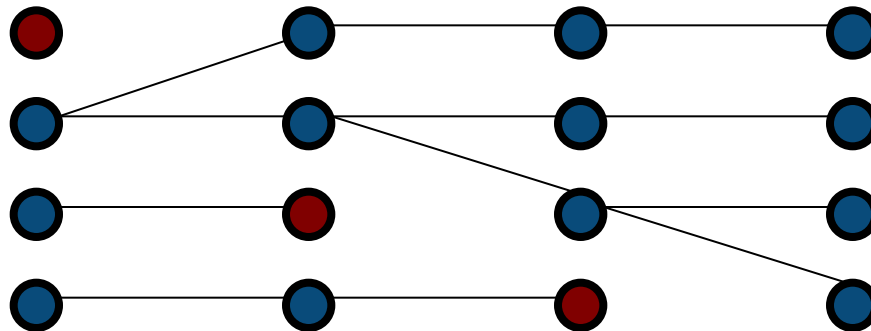

- Goal: Reduce the resampling actions

# Selective Resampling

- Resampling is necessary to achieve convergence
- Resampling is dangerous, since important samples might get lost (“particle depletion”)
- Resampling makes only sense if particle weights differ significantly
- **Key question: When to resample?**

# Number of Effective Particles

- Empirical measure of how well the target distribution is approximated by samples drawn from the proposal

$$n_{eff} = \frac{1}{\sum_i \left( w_t^{[i]} \right)^2}$$

- $n_{eff}$  describes “the inverse variance of the **normalized** particle weights”
- For equal weights, the sample approximation is close to the target

# Resampling with $n_{eff}$


- If our approximation is close to the target, no resampling is needed
- We only resample when  $n_{eff}$  drops below a given threshold ( $N/2$ )

$$\frac{1}{\sum_i \left( w_t^{[i]} \right)^2} \stackrel{?}{<} N/2$$

- Note: weights need to be normalized

[Doucet, '98; Arulampalam, '01]

# Typical Evolution of $n_{eff}$

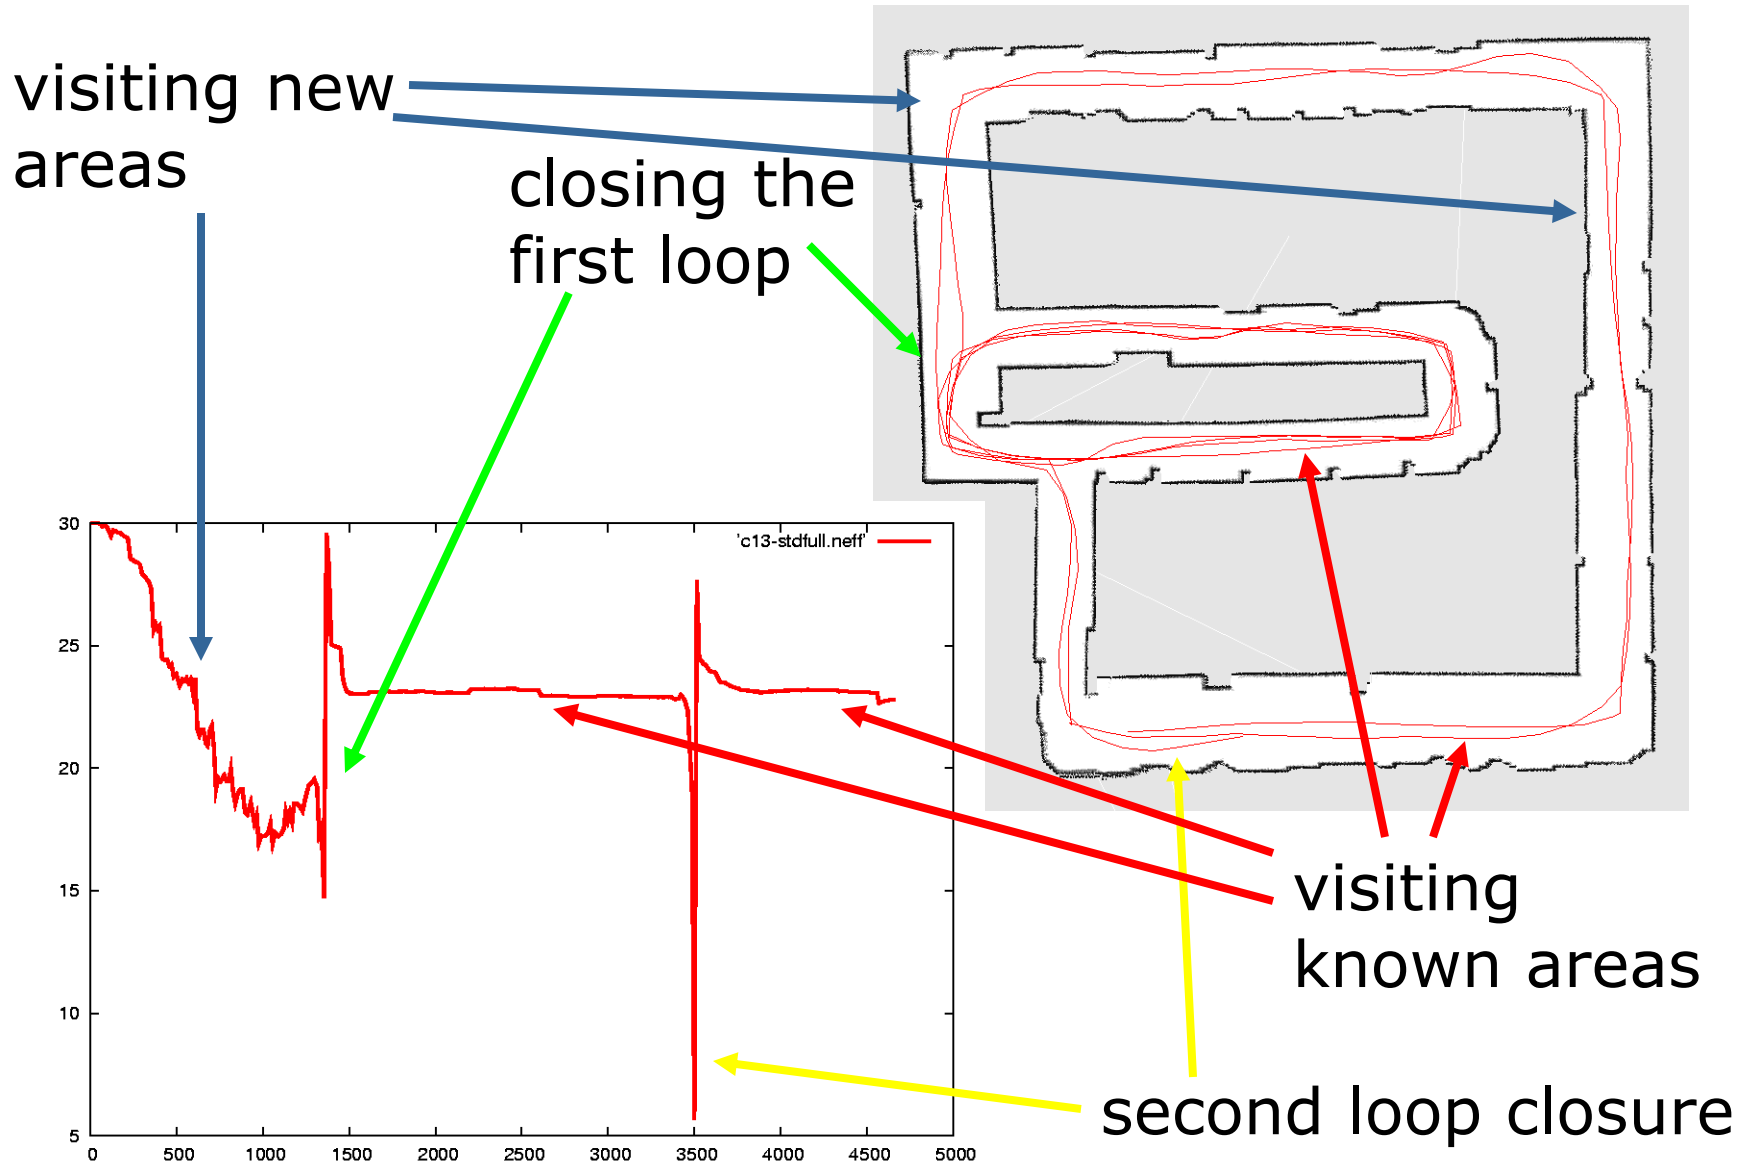


# Intel Lab



- **15 particles**
- four times faster than real-time P4, 2.8GHz
- 5cm resolution during scan matching
- 1cm resolution in final map

# Intel Lab

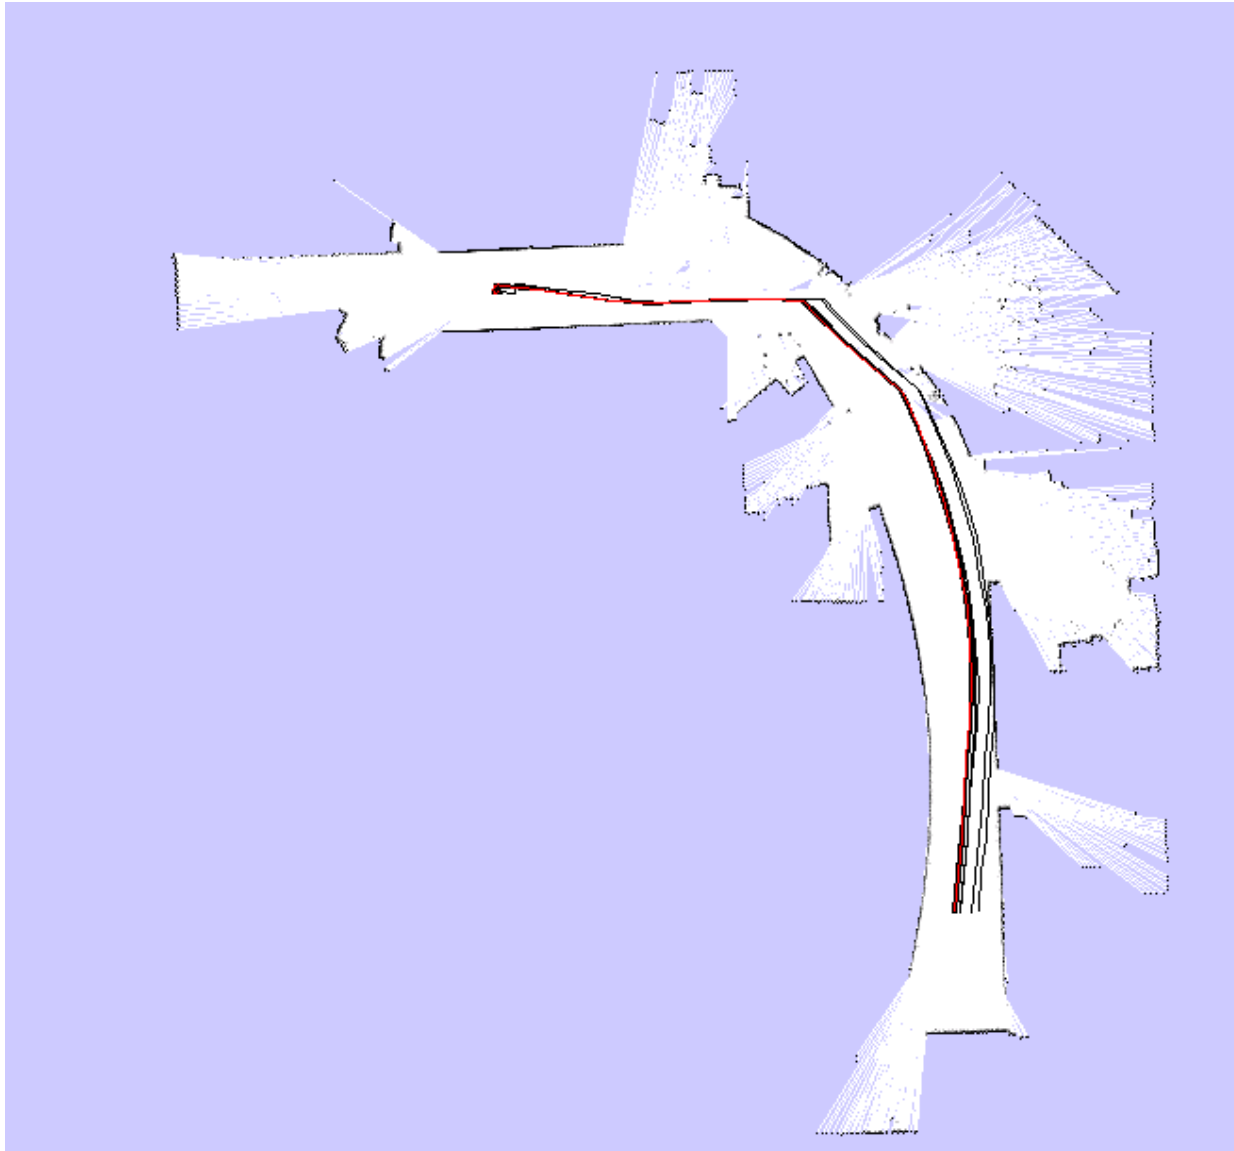

# Outdoor Campus Map



- **30 particles**
- 250x250m<sup>2</sup>
- 1.75 km (odometry)
- 30cm resolution in final map




# MIT Killian Court



- The **“infinite-corridor-dataset”** at MIT

# MIT Killian Court

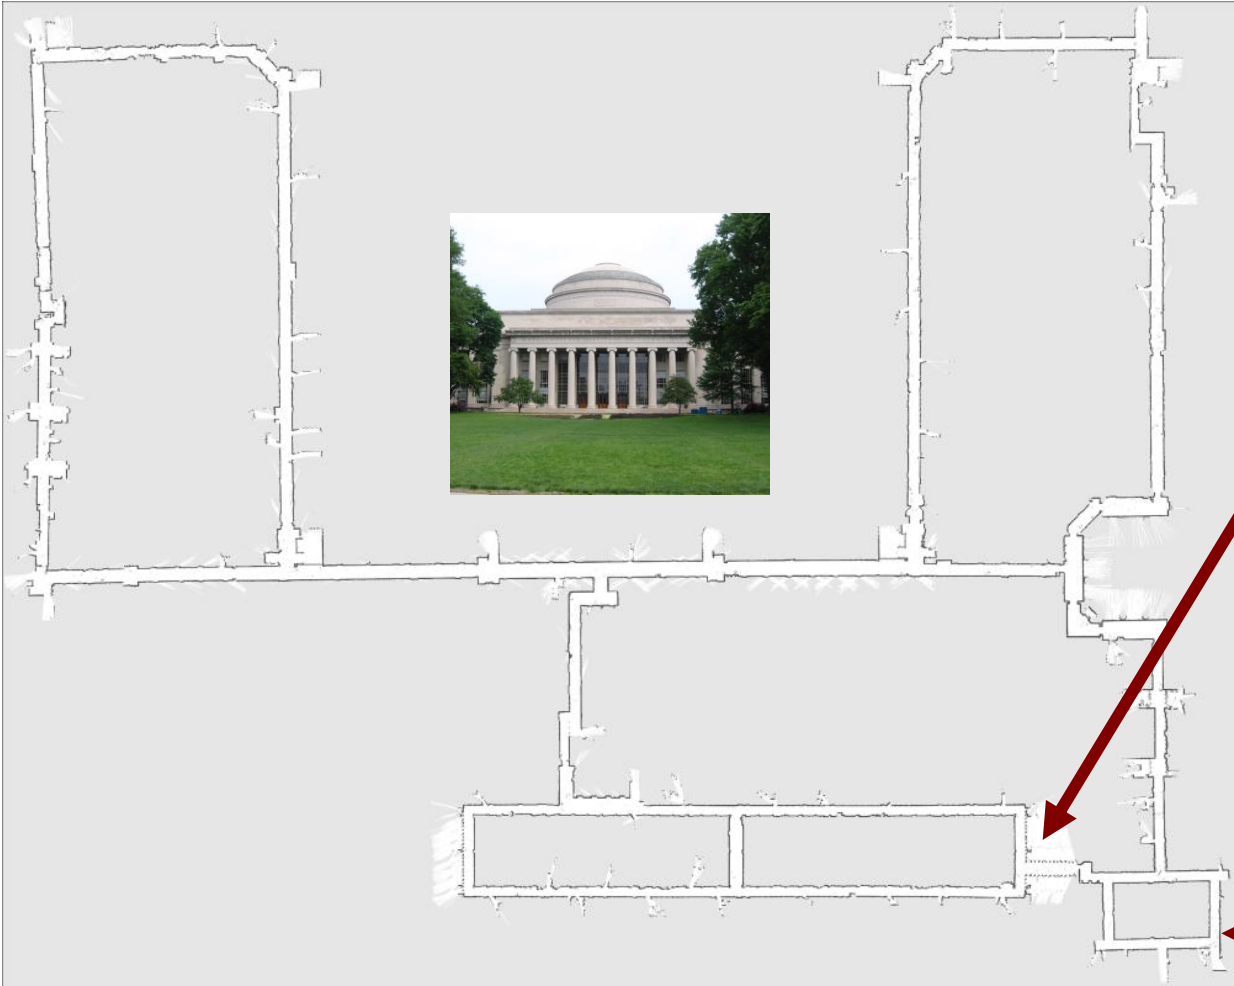

# MIT Killian Court – Video






# Real World Application

- This guy uses a similar technique...



# Problems of Gaussian Proposals

- Gaussians are uni-modal distributions
- In case of loop-closures, the likelihood function might be multi-modal

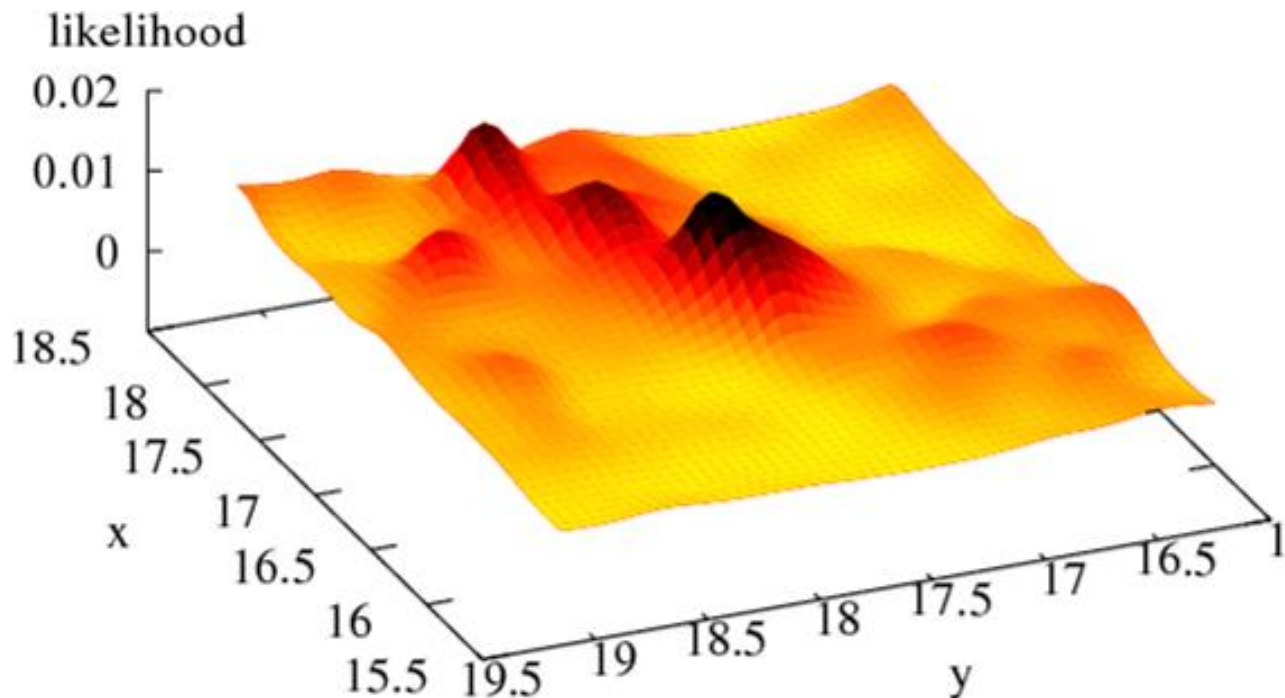

# Gaussian or Non-Gaussian?



- Statistical test to check whether or not sample is generated from a Gaussian
- Anderson-Darling test (based on the cumulative density function)
- Difference between the Gaussian and the optimal proposal via KLD

# Is a Gaussian an Accurate Choice for the Proposal?

Dataset	Gauss	Non-Gauss; 1 mode	Multi-modal
Intel Research Lab	89.2%	7.2%	3.6%
FHW Museum	84.5%	10.4%	5.1%
Belgioioso	84.0%	10.4%	5.6%
MIT CSAIL	78.1%	15.9%	6.0%
MIT Killian Court	75.1%	19.1%	5.8%
Freiburg Bldg. 79	74.0%	19.4%	6.6%

# Problems of Gaussian Proposals


- Multi-modal likelihood function can cause filter divergence

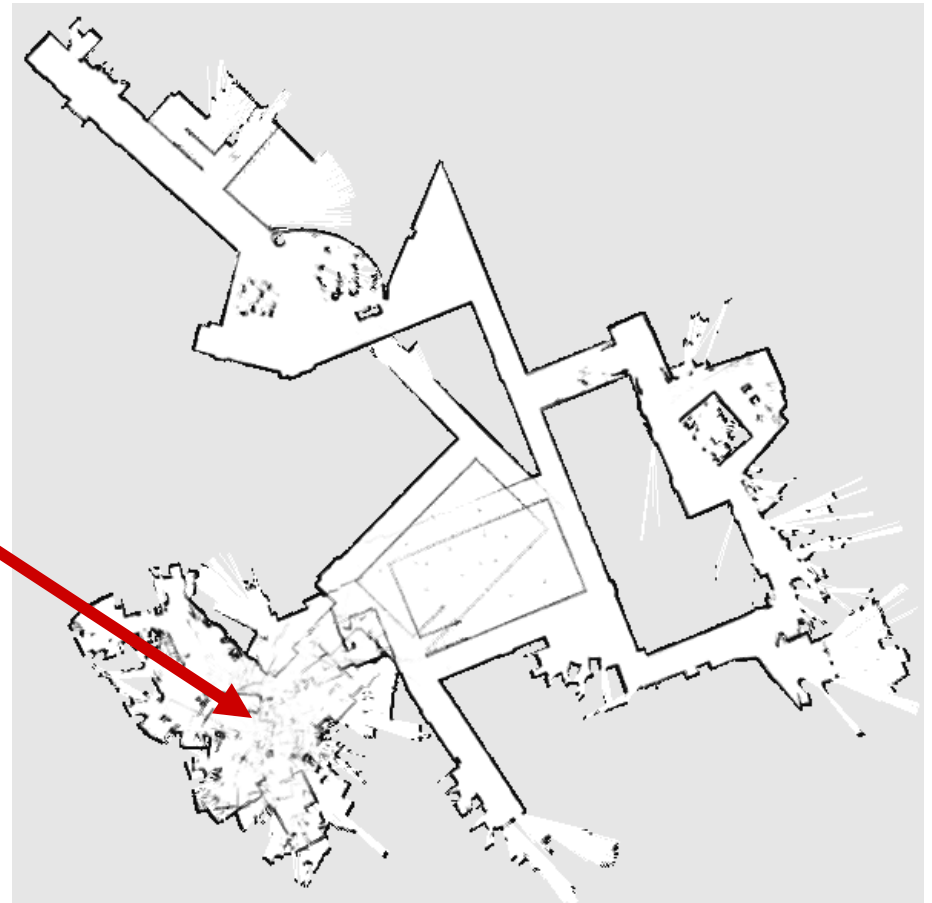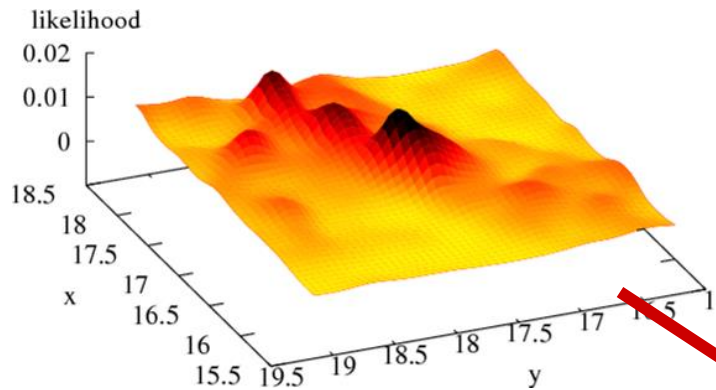





# Efficient Multi-Modal Sampling

- Approximate the likelihood in a better way!

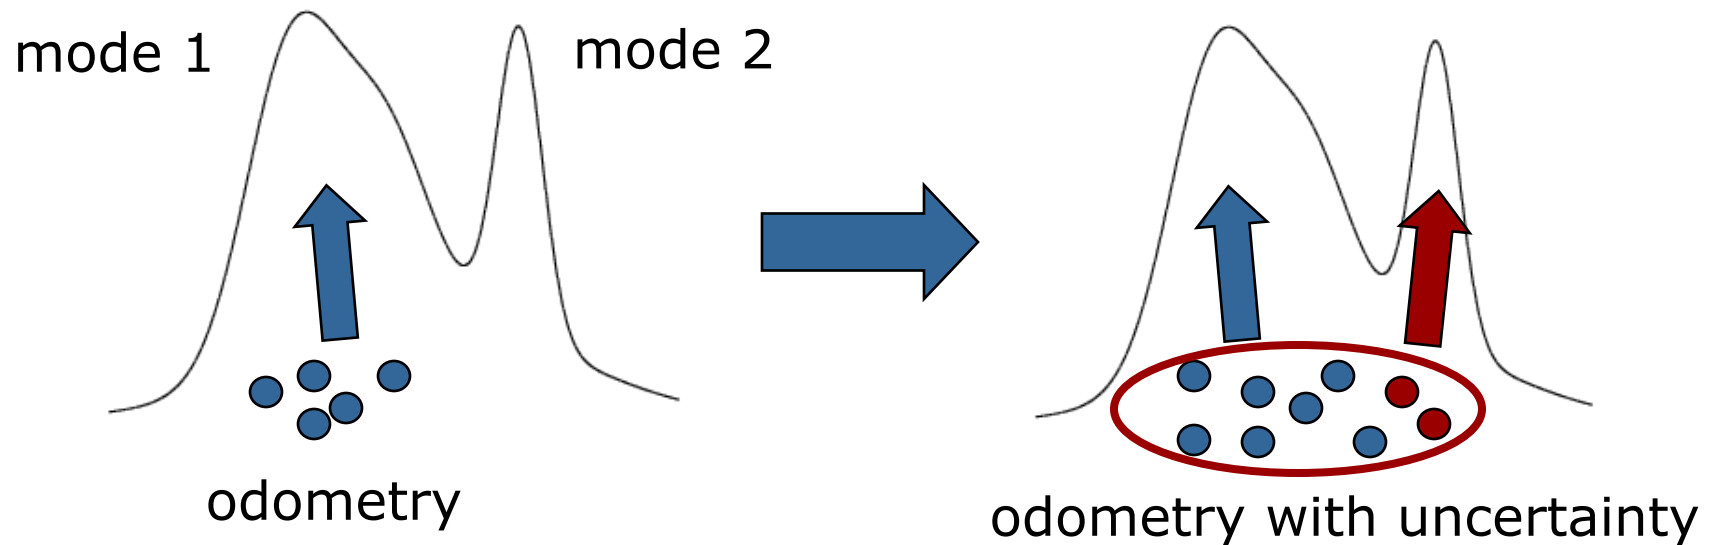

- Sample from odometry first and then use this as the start point for scan matching

# The Two-Step Sampling Works!

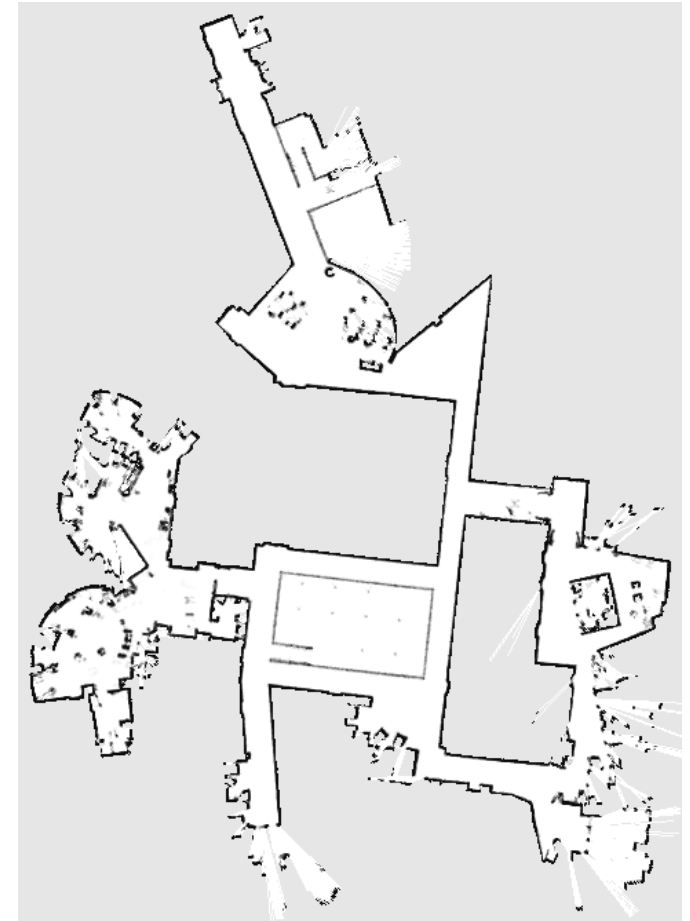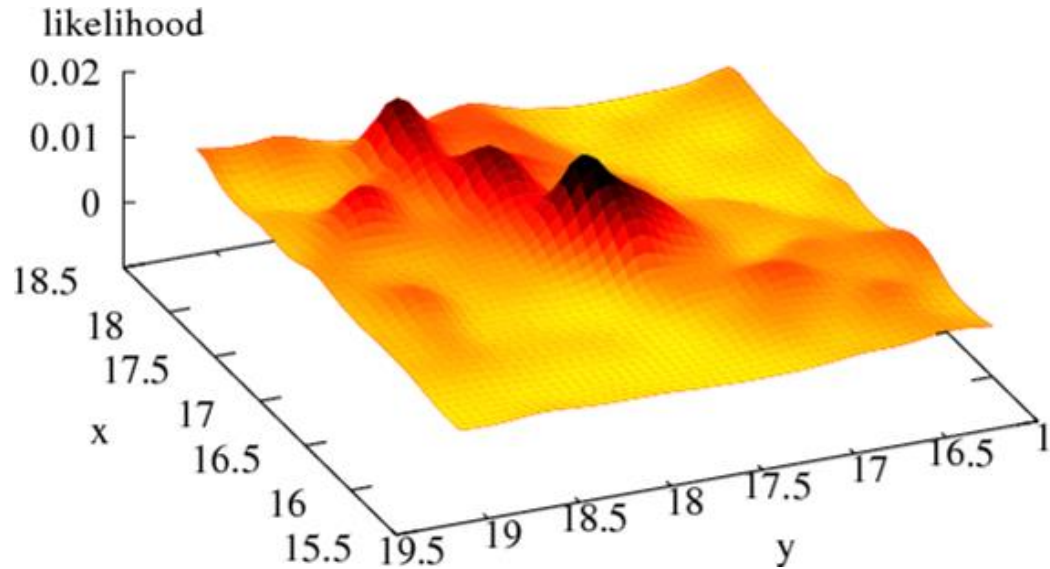


...with nearly zero overhead


# Proposal Error Evaluation

MIT Killian Court


Gaussian Proposal

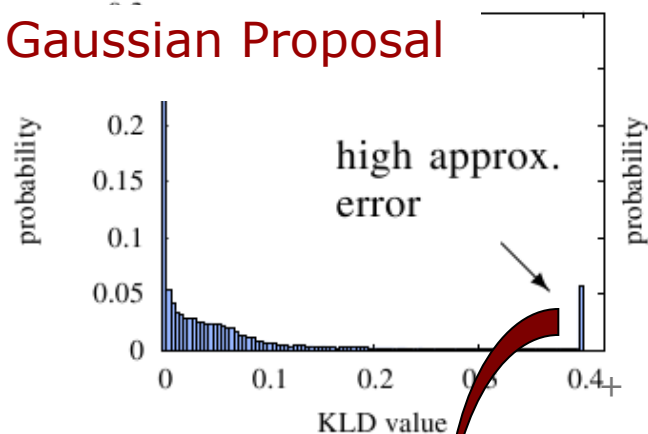




FHW Museum

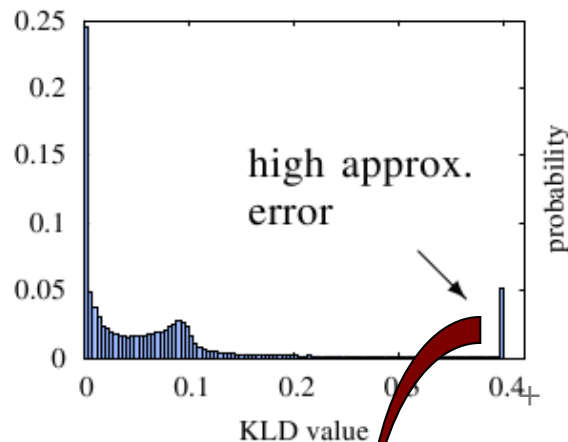

Intel Research Lab

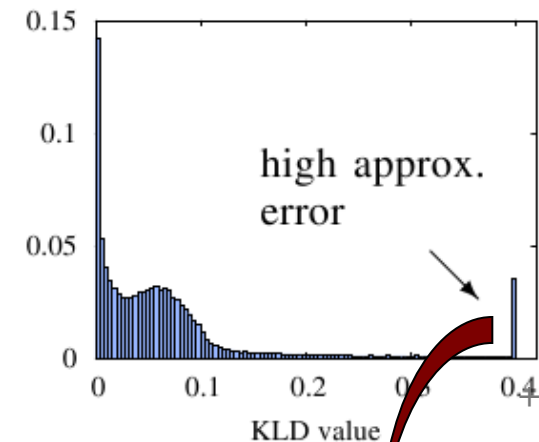

Two-Step Sampling

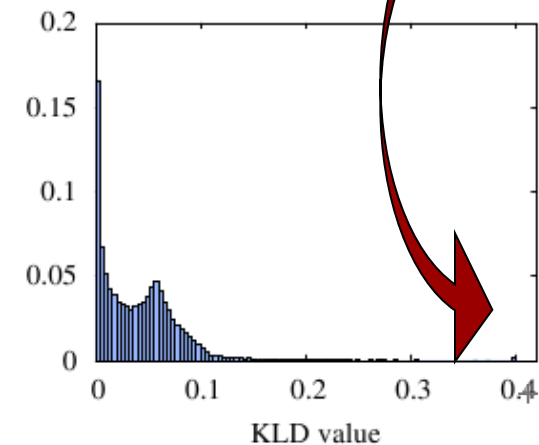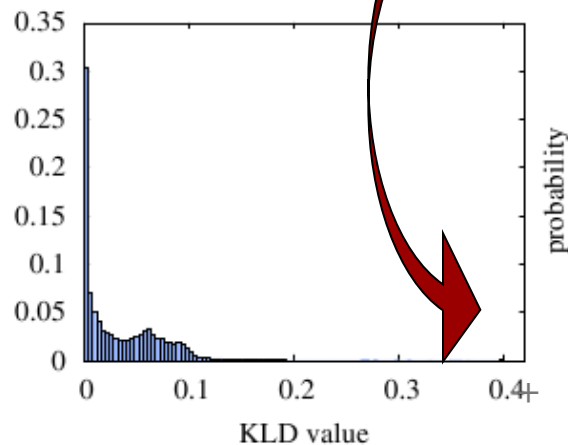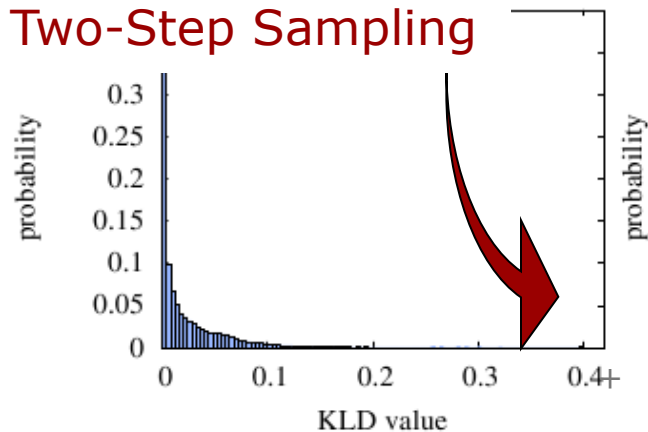

# Effect of Two-Step Sampling

- Allows for better modeling multi-modal likelihood functions (high KLD values do not occur)
- For uni-modal cases, identical results
- Minimal computational overhead

# Gaussian Proposal: Yes or No?

- Gaussian allow for efficient sampling
- Problematic in multi-model cases
- Laser-Based SLAM: 3-6% multi-modal distribution (for the datasets here)
- Gaussian proposals can lead to divergence
- Two-step sampling process overcomes this problem effectively and efficiently

# Conclusion

- The ideas of FastSLAM can also be applied in the context of grid maps
- Improved proposals are essential
- Similar to scan-matching on a per-particle base
- Selective resamples reduces the risk of particle depletion
- Substantial reduction of the required number of particles

# Literature

## **Grid-FastSLAM with Improved Proposals**

- Grisetti, Stachniss, Burgard: Improved Techniques for Grid Mapping with Rao-Blackwellized Particle Filters, 2007
- Stachniss, Giorgio, Burgard, Roy. Analyzing Gaussian Proposal Distributions for Mapping with Rao-Blackwellized Particle Filters, 2007

## **Grid-FastSLAM & Scan-Matching**

- Hähnel, Burgard, Fox, Thrun. An efficient FastSLAM Algorithm for Generating Maps of Large-Scale Cyclic Environments from Raw Laser Range Measurements, 2003

# GMapping

- Efficient open source implementation of the presented method (2005-2008)
- C++ Code available via  
svn co <https://svn.openslam.org/data/svn/gmapping>



# Slide Information

- These slides have been created by Cyrill Stachniss as part of the robot mapping course taught in 2012/13 and 2013/14. I created this set of slides partially extending existing material of Edwin Olson, Pratik Agarwal, and myself.
- I tried to acknowledge all people that contributed image or video material. In case I missed something, please let me know. If you adapt this course material, please make sure you keep the acknowledgements.
- Feel free to use and change the slides. If you use them, I would appreciate an acknowledgement as well. To satisfy my own curiosity, I appreciate a short email notice in case you use the material in your course.
- My video recordings are available through YouTube:  
[http://www.youtube.com/playlist?list=PLgnQpQtFTOGQrZ4O5QzbIHgl3b1JHimN\\_&feature=g-list](http://www.youtube.com/playlist?list=PLgnQpQtFTOGQrZ4O5QzbIHgl3b1JHimN_&feature=g-list)